
TRAKKER Antares 2400 Series Belt Clip and Belt Instruction Sheet

The belt and belt clip allows you to have the TRAKKER® Antares™ 2420 or 2425 terminal hang at your side so you can have both hands free. The belt clip snaps around the belt and a Velcro strap holds the terminal to the belt clip. With the terminal at your side, it is easy to reach when you are ready to resume using it.

To attach the belt clip

- Slide the belt clip flap over the belt and snap the flap closed.
- Buckle the belt so it is snug yet comfortable with the belt clip resting on the outside of the thigh.
- 3. Thread the Velcro strap through the slot on the bottom case of the terminal. (If you have a handstrap on the terminal, you may need to temporarily release it.) Pull the strap through the slot.
- 4. Thread the Velcro strap through the buckle slot and press and rub the two ends of the Velcro strap together until they lock and secure the strap.

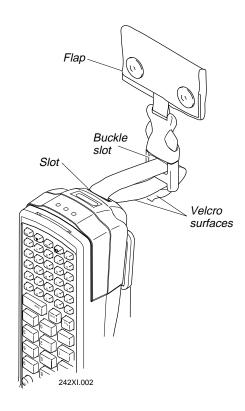

If you need to temporarily remove the terminal, squeeze the buckle to release it. To reattach the terminal, simply snap the buckle ends together.



Technologies Corporation

6001 36th Avenue West P.O. Box 4280 Everett, WA 98203-9280

© 1998 Intermec All Rights Reserved

P/N 064218-005