

## **TRAKKER Antares 2400 Series Handstrap Instruction Sheet**


---

The handstrap is a convenient way to help you grasp and hold the TRAKKER® Antares™ 2420 or 2425 terminal. It is designed to let you securely grip the terminal. When you use the terminal for an extended period of time, the handstrap helps relieve hand stress.

### **To install the handstrap**

1. Using a Phillips screwdriver, unscrew and remove the screw located on the bottom case of the terminal. Save and reuse this screw to attach the handstrap.

*Note: Unscrewing additional screws could void your warranty. For more information, see your terminal user's manual.*

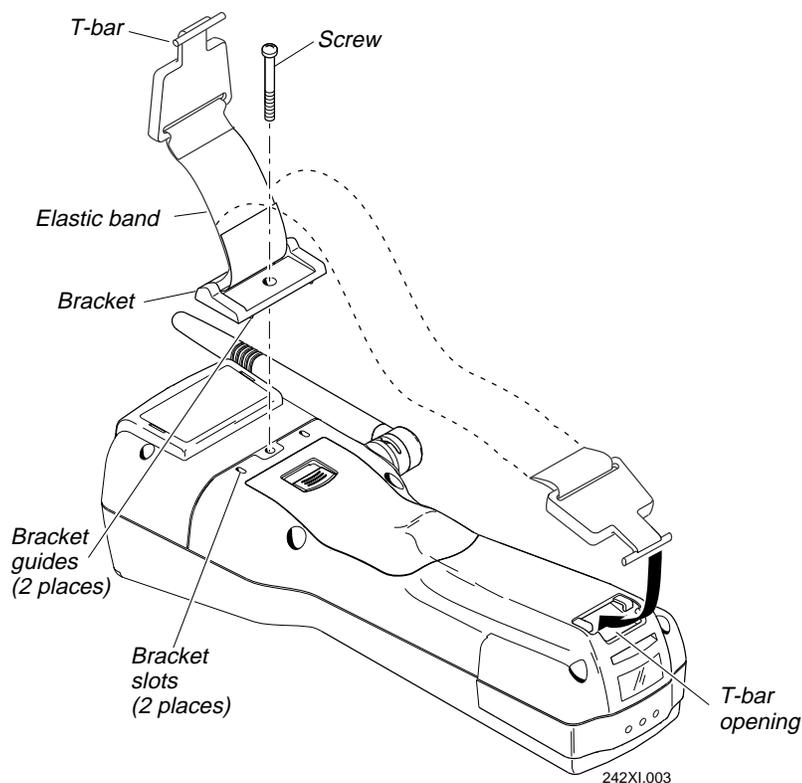

2. Align the handstrap bracket so the two bracket guides line up with the bracket slots on the terminal.
3. Insert the screw through the screw slot in the handstrap bracket and into the bottom case. Tighten the screw to secure the handstrap to the terminal.
4. Stretching the elastic band, place the T-bar into the T-bar opening and slide it under the two notches.

---

### ***Using the Handstrap***

To use the handstrap, simply place your hand under the elastic band and grasp the terminal.

---

### ***Releasing the Handstrap***

You may need to release the handstrap to access the batteries or to install a belt clip. Simply stretch the elastic band to allow the T-bar to slide out from the T-bar opening and then remove it. Replace the battery or insert the belt clip. Stretch the elastic band and reinsert the T-bar into the T-bar opening.



6001 36th Avenue West  
P.O. Box 4280  
Everett, WA 98203-9280

© 1998 Intermec  
All Rights Reserved

P/N 064217-004