


SCANTEAM® 3400 SERIES

Cable Matrix

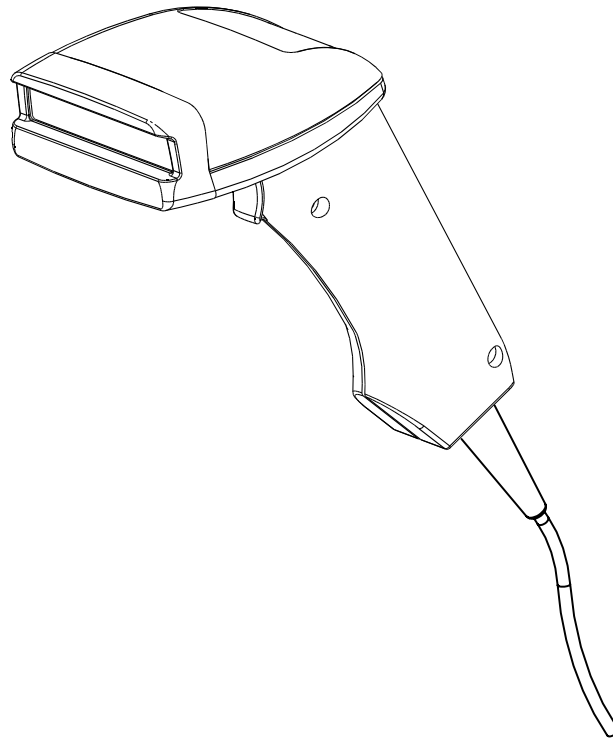

Cable Matrix

Table 15 SCANTEAM 3400 Models –X1, –X2 Primary Interfaces

Terminal Interface	3400–X1	3400–X2	Terminal ID	Cable Part No	Price Code	Notes
AcerNote 950C (Portable PC)	•	•	03	42204841–01	C	After scanner is programmed, press Enter on AcerNote 950C. Enable Keyboard Style F.
ADDS 4000/110, 4000/160, 4000/260	•	•	03	42205543–01	D	
ADI 1496		•	72	42204061–02 EP 42204061–03 42204061–04 EP	E A D	Depending on terminal accessories, external power may be required. 42204061–02 is 15 ft. extended length.
Alpha Micro Systems AM-65 (EP)		•	18	42204479–01 EP 42204479–02 EP	D E	42204479–02 is 15 ft. extended length.
Apple Macintosh (Desk Top Bus), Mac Classic, SE, SE30, II (All)		LR Use P/N 722141 HD Use P/N 722143	49	42204855–09	D	Not all standard interfaces are available in this product.
Apple Macintosh Powerbook Direct Connect 5300 Series (Portable PC)		LR Use P/N 722141 HD Use P/N 722143	49	42205550–01	B	Use cable 42204855–09 with external mouse. Not all standard interfaces are available with this product.
BDS–7 (HDS–7)	•	•	35	42204061–02 EP 42204061–03 42204061–04 EP	E A D	Depending on terminal accessories, external power may be required. 42204061–02 is 15 ft. extended length.
Burr Brown Terminal (Wand Emulation)	•	•	61	42204983–08	C	8 ft. length.
Burroughs B25		•	75	42204800–01	D	
Cary 9000 Series Programmable Keyboard	•	•	00	42203758–03	C	TTL RS232 connects to RS232 port.
Cherry Keyboard (Din–Wand Emulation)	•	•	61	42204731–01	B	
Casio DTS, SA210 OCIA §	•	•	52	42205454–01	E	
Compaq Contura 410 (Portable PC)	•	•	03	42204841–01	C	Enable Keyboard Style F.
Computer Identics SCANSTAR 420/425/426	•	•		See Table 20 (Page Page 67) for secondary interface information.		
Connect Air Wireless RF Transmitter	•	•		42204606–01	C	Industry Standard. Power on Pin 9. Dual interface. Laser emulation, HHLC. Refer to the SCANTEAM 3400 User's Guide for programming instructions. Choose "Laser Emulation" selection.
Datacap (Wand Emulation)	•	•	64	42204885–06	C	
Datasym Symposium 2000 PCB (RS232)	•	•	00	42205398–01	C	Direct Connect RS232.

EP = External Power Required – Power supply not included, priced separately
§ DO NOT use SCANTEAM 3000 OR 5500 interface cables with the SCANTEAM 3400 Series.

Not all foreign keyboards are supported in all terminals. Please consult factory for details.

List Price Code:	
A = \$30	D = \$60
B = \$36	E = \$77
C = \$50	F = \$100

Cable Matrix

Table 15 SCANTEAM 3400 Models –X1, –X2 Primary Interfaces *continued*

Terminal Interface	3400–X1	3400–X2	Terminal ID	Cable Part No	Price Code	Notes
Datasym Symposium (RS232)	•	•	00	42205400–01	C	
DDC 3596, 3597 (EP)		•	30	42204203–01 EP	F	
DDC IS 386, IS 386E, IS 387, IS 387C, IS 486	•	•	07	42204061–02 EP 42204061–03 42204061–04 EP	E A D	Depending on terminal accessories, external power may be required. 42204061–02 is 15 ft. extended length.
DEC PC 433 SE (Portable PC)	•	•	03	42204841–01	C	Enable Keyboard Style F.
DEC VT510, 520, 525 (DEC Style, LK411)	•	•	A4	42204062–02 EP 42204062–03	E A	42204062–02 is 15 ft. extended length.
DEC VT510, 520, 525 (PC Style)	•	•	05	42204062–02 EP 42204062–03	E A	42204062–02 is 15 ft. extended length.
Dell Latitude (Portable PC)	•	•	03	42204841–01	C	Enable Keyboard Style F.
DTK-486 SLC (Portable PC)	•	•	03	42204841–01	C	Enable Keyboard Style F.
Esprit 200, 400	•	•	05	42204062–02 EP 42204062–03 42204062–04 EP	E A D	Depending on terminal accessories, external power may be required. External power required for AutoTrigger. 42204062–02 is 15 ft. extended length.
Falco 5220		•	47	42204061–02 EP 42204061–03 42204061–04 EP	E A D	Depending on terminal accessories, external power may be required. 42204061–02 is 15 ft. extended length.
Falco Infinity Terminal	•	•	01	42204061–02 EP 42204061–03 42204061–04 EP	E A D	Depending on terminal accessories, external power may be required. 42204061–02 is 15 ft. extended length.
Fujitsu 7770, 7990 OCR	•		53	42204099–01		Call factory for pricing and availability.
Fujitsu 7770, 7990 OCR (EP)	•		53	42204098–01 EP		Call factory for pricing and availability.
Fujitsu 87S OCR (EP)	•		53	42204097–01 EP		Call factory for pricing and availability.
Fujitsu OCR Atrium 9000 Series (EP)	•		53	42204096–01 EP		Call factory for pricing and availability.
Fujitsu Stylistic (Portable PC)	•	•	03	42204841–01	C	Fujitsu needs BIOS revision 1.16 or higher. Enable Keyboard Style F.
Fujitsu Team POS 5000 (RS232)	•	•	00	42203758–03	C	TTL RS232 powered by terminal.
Heath Zenith	•	•	90	42204868–09 42204868–01 EP	B D	Depending on terminal accessories, external power may be required.
HHLC (Laser Out/Bar Image) Series	•	•		See Table 20 (Page 67) for secondary interface information.		

EP = External Power Required – Power supply not included, priced separately

Not all foreign keyboards are supported in all terminals. Please consult factory for details.

List Price Code:	
A = \$30	D = \$60
B = \$36	E = \$77
C = \$50	F = \$100

Cable Matrix

Table 15 SCANTEAM 3400 Models –X1, –X2 Primary Interfaces *continued*

Terminal Interface	3400–X1	3400–X2	Terminal ID	Cable Part No	Price Code	Notes
HP 700/44 (EP)		•	96	42204203–01 EP	F	
HP 700/92, 700/94, 700/96, 700/98 (EP)		•	20	42204203–01 EP	F	
HP 700/32, 700/60 (EP)		•	79	42204203–01 EP	F	
HP Vectra (Din)	•	•	03	42204061–02 EP 42204061–03 42204061–04 EP	E A D	Depending on terminal accessories, external power may be required. 42204061–02 is 15 ft. extended length.
HP Vectra (Mini Din)	•	•	03	42204062–02 EP 42204062–03 42204062–04 EP	E A D	Depending on terminal accessories, external power may be required. 42204062–02 is 15 ft. extended length.
IBM 3151, 3471, 3472, 3476, 3477	•	•	06 (102 key) See notes for 122 key	42204064–01 42204064–02 EP 42204064–15 EP	D E	Terminal IDs for 122 key: 07 (3471/72, 122 key) 08 (3476/77, 122 key) 42204064–15 is 15 ft. extended length – call factory for pricing and availability.
IBM 3153	•	•	03	42205543–01	D	
IBM 3161, 3162, 3163, 3179, 3191, 3192, 3194, 3196, 3197	•	•	06 (102 key) See notes for 122 key	42204089–01 42204089–15 EP	D	Terminal IDs for 122 key: 07 (3191/92, 122 key) 08 (3196/97, 122 key) 42204089–15 is 15 ft. extended length - call factory for pricing and availability.
IBM 3180	•	•	24	42204089–01 42204089–15 EP	D	42204089–15 is 15 ft. extended length - call factory for pricing and availability.
IBM 3482, 3486, 3488	•	•	06 (102 key) 08 (122 key)	42204064–01 42204064–02 EP 42204064–15 EP	D E	42204064–15 is 15 ft. extended length – call factory for pricing and availability.
IBM 3487	•	•	08 (122 key)	42204064–01 42204064–02 EP 42204064–15 EP	D E	42204064–15 is 15 ft. extended length – call factory for pricing and availability.
IBM 4683/84, 4693 – Port 5B	•		51	42203761–01	C	8 Pin SDL connector (“E Key”) – Scanner may be programmed for 5B, 9B, or Port 17 protocol.
IBM 4683/84, 4693/94 – Port 9A/B/E (12V) §	•		51	42205155–01	C	4 Pin SDL connector (“A Key”) – Scanner may be programmed for 5B, 9B, or Port 17 protocol.
IBM 4683/84 – Port 17	•		51	42203771–01	F	16 Pin SDL connector (“A Key”) – Scanner may be programmed for 5B, 9B, or Port 17 protocol.
IBM 4683/84, 4693/94 Port 5A Direct Connect	•		51	42205709–01	C	8 Pin SDL connector (“E Key”).
IBM 4683 OCR/Port 21 (EP)	•		53	42204213–01 EP		Call factory for pricing and availability.

EP = External Power Required – Power supply not included, priced separately
§ DO NOT use SCANTEAM 3000 OR 5500 interface cables with the SCANTEAM 3400 Series.

Not all foreign keyboards are supported in all terminals. Please consult factory for details.

List Price Code:	
A = \$30	D = \$60
B = \$36	E = \$77
C = \$50	F = \$100

Cable Matrix

Table 15 SCANTEAM 3400 Models –X1, –X2 Primary Interfaces *continued*

Terminal Interface	3400–X1	3400–X2	Terminal ID	Cable Part No	Price Code	Notes
IBM 7526/27 (Wand Emulation)	•	•	61	42204533–01	C	
IBM AT/XT/PS2 Series Combo	•	•		42204868–09 42204868–01 EP	B D	Interchangeable cable on mini Din or Din – PC's and PS/2. Depending on terminal accessories, external power may be required. See SCANTEAM 3400 Decoded Out Operating Guide and Programming Menu for terminal ID.
IBM AT/PS2 Compatible (Mini Din) Keyboard Emulation – Non Wedge	•	•	03	42204841–01	C	This feature was previously supported in P/N522080, but is now part of standard product with firmware 4.0 or above. Additional programming required. Refer to the SCANTEAM 3400 User's Guide.
IBM AT Compatible (Din) Keyboard Emulation – Non Wedge	•	•	03	42205294–01	D	This feature was previously supported in P/N522080, but is now part of standard product with firmware 4.0 or above. Additional programming required. Refer to the SCANTEAM 3400 User's Guide.
IBM PC Clones (Din)	•	•	03 (See Notes)	42204061–02 EP 42204061–03 42204061–04 EP	E A D	Refer to Table 43 (Page 118) for examples of supported PCs. 42204061–02 is 15 ft. extended length.
IBM PC Clones (Mini Din)	•	•	03 (See Notes)	42204062–02 EP 42204062–03 42204062–04 EP	E A D	Refer to Table 43 (Page 118) for examples of supported PCs. 42204062–02 is 15 ft. extended length.
IBM AT/XT (Din)	•	•	01 (XT) or 03 (AT)	42204061–02 EP 42204061–03 42204061–04 EP	E A D	Refer to Table 43 (Page 118) for examples of supported PCs. 42204061–02 is 15 ft. extended length.
IBM AT (Mini Din)	•	•	03	42204062–02 EP 42204062–03 42204062–04 EP	E A D	Refer to Table 43 (Page 118) for examples of supported PCs. 42204062–02 is 15 ft. extended length.
IBM PS/2 30–286, 50, 55SX, 60, 70, 70–061, 70–121, 80 (Mini Din)	•	•	03	42204062–02 EP 42204062–03 42204062–04 EP	E A D	Also supports Unix X–Windows versions. Depending on terminal accessories, external power may be required. 42204062–02 is 15 ft. extended length.
IBM PS/2 25, 30, 77DX2 (Mini Din)	•	•	02	42204062–02 EP 42204062–03 42204062–04 EP	E A D	Also supports Unix X–Windows versions. Depending on terminal accessories, external power may be required. 42204062–02 is 15 ft. extended length.
IBM 4614 Sure One POS (RS232)	•	•	00	42205566–01	C	For the 15-pin powered ports.
IBM Thinkpad 365, 755 CV (Portable PC)	•	•	03	42205606–01	B	Enable Keyboard Style F.

EP = External Power Required – Power supply not included, priced separately

Not all foreign keyboards are supported in all terminals. Please consult factory for details.

List Price Code:	
A = \$30	D = \$60
B = \$36	E = \$77
C = \$50	F = \$100

Cable Matrix

Table 15 SCANTEAM 3400 Models –X1, –X2 Primary Interfaces *continued*

Terminal Interface	3400–X1	3400–X2	Terminal ID	Cable Part No	Price Code	Notes
IBM Thinkpad 360 CSE, 340, 750 (Portable PC)		•	97	42205606–01	B	This feature was previously supported by P/N 522269, but is now part of the standard product with firmware 4.0 and above. Enable Keyboard Style F. (No adapter cable required.)
ICL 9507 OCIA §	•	•	52	42205485–01	C	
IDEAssociates 276, 277, 486, 487, 587, 12471–01ADC		•	71 (122 Key)	42204093–01	E	
Innovax Version 4 POS (RS232)	•	•	00	42205479–01	C	
I/O 2676D, 2677C, 2677D	•	•	08 (122 key)	42204062–02 EP 42204062–03 42204062–04 EP	E A D	Depending on terminal accessories, external power may be required. 42204062–02 is 15 ft. extended length.
Intermec 94XX, 95XX Series (Wand Emulation, Code 39 or Same Code)	•	•		42205191–01	B	Secondary Interface! See SCANTEAM 3400 Decoded Out Operating Guide and Programming Menu for information about programming a secondary interface. Output polarity must be programmed for white high.
Intermec 97XX Series, Janus (Wand Emulation, Code 39 or Same Code)	•	•		42205192–01	C	Secondary Interface! See SCANTEAM 3400 Decoded Out Operating Guide and Programming Menu for information about programming a secondary interface. Output polarity must be programmed for white high.
ITT 9271	•	•	07	42204836–01	D	
Lee Data IIS	•	•	07	42204061–02 EP 42204061–03 42204061–04 EP	E A D	Depending on terminal accessories, external power may be required. 42204061–02 is 15 ft. extended length.
Link MCD 6420 (EP)		•	A1	42204479–01 EP 42204479–02 EP	D E	42204479–02 is 15 ft. extended length.
Link MC–5, MC-3+ (EP) ANSI ASCII Enhanced PC		•	15 14 18	42204479–01 EP 42204479–02 EP	D E	42204479–02 is 15 ft. extended length.
Midwest Micro Elite TS 30PS (Portable PC)	•	•	03	42204841–01	C	Enable Keyboard Style F.
Mitac 4022 (Portable PC)	•	•	03	42204841–01	C	Enable Keyboard Style F.
NCR 2123, Samurai 7058 OCIA §	•	•	52	42205164–01	C	

EP = External Power Required – Power supply not included, priced separately
§ DO NOT use SCANTEAM 3000 OR 5500 interface cables with the SCANTEAM 3400 Series.

Not all foreign keyboards are supported in all terminals. Please consult factory for details.

List Price Code:	
A = \$30	D = \$60
B = \$36	E = \$77
C = \$50	F = \$100

Cable Matrix

Table 15 SCANTEAM 3400 Models –X1, –X2 Primary Interfaces *continued*

Terminal Interface	3400–X1	3400–X2	Terminal ID	Cable Part No	Price Code	Notes
NCR 2126 OCIA §	•	•	52	42205402–01	C	
NCR 2127 OCIA §	•	•	52	42205330–01	F	
NCR 2152 OCIA §	•	•	52	42205165–01	C	
NCR 2920	•	•	03	42205543–01	D	
NCR 4940 Aux Port (EP)	•	•	00	42205662–01 EP	C	Connects scanner to Aux Port of terminal. 25 Pin Male.
NCR 7052 OCIA §	•	•	52	42205166–01	D	
NCR 7150 OCIA §	•	•	52	42205166–01	D	
NCR 745X DYNAKEY RS232	•	•	00	42205837–01	C	Mod 8 Pin shielded male.
Nixdorf 8812 OCIA §	•	•	52	42205168–01	E	
Norand 1100, 1700 (Wand Emulation)	•	•	61	42203764–03	C	Special Note! Power on Pin 9. 7 ft. extended length.
Olivetti M19, M200	•	•	01	42204061–02 EP 42204061–03 42204061–04 EP	E A D	Depending on terminal accessories, external power may be required. 42204061–02 is 15 ft. extended length.
Olivetti M24, M28 (12V) §	•		01	42205156–01	C	
Olivetti M240, M250, M290, M380, P500	•	•	03	42204062–02 EP 42204062–03 42204062–04 EP	E A D	Depending on terminal accessories, external power may be required. 42204062–02 is 15 ft. extended length.
Panasonic JT760, 770 (Wand Emulation)	•	•	61	42204441–01	C	
PSION HC 100/110 (Wand Emulation)	•	•	61	42204987–04	E	
PSION Workabout (Wand Emulation) with 9 Pin Squeeze Connector.	•	•	61	42203764–03	C	Special Note! Power on Pin 9. 7 ft. extended length.
Qume QVT61, 62, 70, 191, 321, 322 ANSI		•	82	42204197–01	D	
Qume QVT31, 51, 61, 62, 70, 191 ASCII		•	74	42204197–01	D	
Qume QVT61, 62, 70, 82, 191, QX15 Enhanced PC		•	38	42204197–01	D	
Qume QVT 520 (EP)		•	A1	42204479–01 EP 42204479–02 EP	D E	Requires Rev. 5.X software or higher. 42204479–02 is 15 ft. extended length.
Relisys TR 175 Terminal (Din)	•	•	03	42204061–02 EP 42204061–03	E A	42204061–02 is 15 ft. extended length.

EP = External Power Required – Power supply not included, priced separately
§ DO NOT use SCANTEAM 3000 OR 5500 interface cables with the SCANTEAM 3400 Series.

Not all foreign keyboards are supported in all terminals. Please consult factory for details.

List Price Code:	
A = \$30	D = \$60
B = \$36	E = \$77
C = \$50	F = \$100

Cable Matrix

Table 15 SCANTEAM 3400 Models –X1, –X2 Primary Interfaces *continued*

Terminal Interface	3400–X1	3400–X2	Terminal ID	Cable Part No	Price Code	Notes
RS232 TTL Output with integrated Mini Din power stealer (9 Pin "D" Female)	●	●	00	42205895–01	D	TX (Data on 3400) on Pin 2 of DB–9. Plugs into PC external mouse or keyboard port.
RS232 TTL Output (6 Pin Mod)	●	●	00	42205328–01	C	For connecting unit to SCANTEAM 2000 aux port.
RS232 TTL Output (9 Pin "D" Male)	●	●	00	42203758–01	C	TX (Data from 3400) on Pin 2 of DB–9.
RS232 TTL Output (9 Pin "D" Male EP)	●	●	00	42203758–02 EP	D	TX (Data from 3400) on Pin 2 of DB–9.
RS232 TTL Output (9 Pin "D" Female)	●	●	00	42203758–03	C	TX (Data from 3400) on Pin 2 of DB–9.
RS232 TTL Output (9 Pin "D" Female EP)	●	●	00	42203758–04 EP	D	TX (Data from 3400) on Pin 2 of DB–9.
RS232 TTL Output (25 Pin "D" Male)	●	●	00	42203759–01	C	TX (Data from 3400) on Pin 3 of DB–25.
RS232 TTL Output (25 Pin "D" Male EP)	●	●	00	42203759–02 EP	D	TX (Data from 3400) on Pin 3 of DB–25.
RS232 TTL Output (25 Pin "D" Female)	●	●	00	42203759–03	C	TX (Data from 3400) on Pin 3 of DB–25.
RS232 TTL Output (25 Pin "D" Female EP)	●	●	00	42203759–04 EP	D	TX (Data from 3400) on Pin 3 of DB–25.
Samsung 6450, 6500 POS (RS232)	●	●	00	42203758–03	C	Special programming required. Contact Applications Support for details. TTL RS232 powered by terminal.
Sharp 4230 POS (RS232)	●	●	00	42205398–01	C	Direct connect RS232.
Sherwood ST5000, ST6030, ST7000 (EP) 12V interface	Use P/N 822037 (3400HD–11) Use P/N 822038 (3400LR–11)		78	42205666–01	F	Mod 6 pin male/female.
Siemens 9758 (German Only)	●	●	34	42204061–02 EP 42204061–03 42204061–04 EP	E A D	Depending on terminal accessories, external power may be required. 42204061–02 is 15 ft. extended length.
SiliconGraphics Indy, IndigoII	●	●	05	42204062–02 EP 42204062–03 42204062–04 EP	E A D	42204062–02 is 15 ft. extended length.
Stratus V103 (EP)		●	14	42204479–01 EP 42204479–02 EP	D E	42204479–02 is 15 ft. extended length.
Sun River Data Systems, ADDS 4000/110, 4000/160, 4000/260	●	●	03	42205543–01	D	
Swintek 2250 POS (RS232)	●	●	00	42205352–01	D	

EP = External Power Required – Power supply not included, priced separately

Not all foreign keyboards are supported in all terminals. Please consult factory for details.

List Price Code:	
A = \$30	D = \$60
B = \$36	E = \$77
C = \$50	F = \$100

Cable Matrix

Table 15 SCANTEAM 3400 Models –X1, –X2 Primary Interfaces *continued*

Terminal Interface	3400–X1	3400–X2	Terminal ID	Cable Part No	Price Code	Notes
Symbol LL500 (OmniLink) (Wand Emulation, Code 39 or Same Code)	•	•	61 or 64	42205338–01	C	
Symbol LL500 (OmniLink) (Wand Emulation, Code 39 or Same Code)	•	•		42205337–01	D	Secondary Interface! See SCANTEAM 3400 Decoded Out Operating Guide and Programming Menu for information about programming a secondary interface.
TEC 1650, 1900, 2000, 2100 OCIA §	•	•	52	42205469–01	C	See SCANTEAM 3400 Decoded Out Operating Guide and Programming Menu for instructions on scanning the Spectra Physics Plug and Play bar code.
Televideo 905, 955 (12V) §	•		36	42205161–01	E	
Televideo 965, 9065	•		36	42204749–01	E	
Televideo 990, 995, 9060	•	•	02	42204062–02 EP 42204062–03	E A	42204062–02 is 15 ft. extended length.
Telex 078, 078A, 79, 80, 191, 196, 1191, 1192, 1471, 1472, 1476, 1477, 1483	•	•	25 (88 key)	42204061–02 EP 42204061–03 42204061–04 EP	E A D	Depending on terminal accessories, external power may be required. 42204061–02 is 15 ft. extended length.
Telex 078, 078A, 79, 80, 191, 196, 1191, 1192, 1471, 1472, 1476, 1477, 1483	•	•	45 (102 key)	42204061–02 EP 42204061–03 42204061–04 EP	E A D	Depending on terminal accessories, external power may be required. 42204061–02 is 15 ft. extended length.
Telex 078, 078A, 79, 80, 191, 196, 1191, 1192, 1471, 1472, 1476, 1477, 1482, 1483	•	•	46 (122 key)	42204061–02 EP 42204061–03 42204061–04 EP	E A D	Depending on terminal accessories, external power may be required. 42204061–02 is 15 ft. extended length.
Telex 1151	•	•	45 (102 key) See notes for 122 key	42204061–02 EP 42204061–03 42204061–04 EP	E A D	Depending on terminal accessories, external power may be required. Terminal ID for 122 key: 46. 42204061–02 is 15 ft. extended length.
Telxon 610, 710, 860 (HHLC)	•	•		42205380–01	C	Secondary Interface. 8 Pin Modular Connector.
Texas Instruments Extensa 560CD, 650CD (Portable PC)	•	•	03	42204841–01	C	Enable Keyboard Style F.
Toshiba Satellite T1960, T2130 CS (Portable PC)	•	•	03	42204841–01	C	Enable Keyboard Style F.
Toshiba 2600 (Portable PC)	•	•	03	42204841–01	C	Enable Keyboard Style F.

EP = External Power Required – Power supply not included, priced separately
 § DO NOT use SCANTEAM 3000 OR 5500 interface cables with the SCANTEAM 3400 Series.

Not all foreign keyboards are supported in all terminals. Please consult factory for details.

List Price Code:	
A = \$30	D = \$60
B = \$36	E = \$77
C = \$50	F = \$100

Cable Matrix

Table 15 SCANTEAM 3400 Models –X1, –X2 Primary Interfaces *continued*

Terminal Interface	3400–X1	3400–X2	Terminal ID	Cable Part No	Price Code	Notes
Unisys TO–300, 120 (EP) ANSI ASCII Enhanced PC		•	15 14 18	42204479–01 EP 42204479–02 EP	D E	42204479–02 is 15 ft. extended length.
Verifone® RS232 to Wandem Adapter	•	•	00	0342206078–01	A	For use with 6 pin Din connectors on Verifone terminals that support wand emulation decoding. Used in conjunction with cable p/n 42203758–04. External power supply required for scanner. Scanner should be programmed for Code 39 wand emulation.
Visa Link MP500, MP600 (EP)	•	•	03	42204062–02 EP 42204062–04 EP	E D	For 104 key keyboards with 12 function keys. 42204062–02 is 15 ft. extended length.
Wand Emulation Code 39	•	•	61	42203764–01 42203764–04 42203764–03 42203764–05	C C C C	Special Note! Power on Pin 4. 7 ft. extended length. Special Note! Power on Pin 4. 16 ft. extended length. Special Note! Power on Pin 9. 7 ft. extended length. Special Note! Power on Pin 9. 16 ft. extended length.
Wand Emulation Native/Same Code	•	•	64	42203764–01 42203764–04 42203764–03 42203764–05	C C C C	Special Note! Power on Pin 4. 7 ft. extended length. Special Note! Power on Pin 4. 16 ft. extended length. Special Note! Power on Pin 9. 7 ft. extended length. Special Note! Power on Pin 9. 16 ft. extended length.
Wand Emulation (Secondary Interface)	•	•				Needed for switched power. Refer to Table 20 (Page 67).
WYSE 30 (EP)		•	13	42204479–01 EP 42204479–02 EP	D E	42204479–02 is 15 ft. extended length.
WYSE 85, 185 (EP)		•	16	42204479–01 EP 42204479–02 EP	D E	42204479–02 is 15 ft. extended length.
WYSE 55, 60, 120 (EP) ANSI ASCII Enhanced PC		•	15 14 18	42204479–01 EP 42204479–02 EP	D E	42204479–02 is 15 ft. extended length.
WYSE 150, 160 (EP) ANSI ASCII Enhanced PC		•	15 14 18	42204479–01 EP 42204479–02 EP	D E	42204479–02 is 15 ft. extended length.

EP = External Power Required – Power supply not included, priced separately

Not all foreign keyboards are supported in all terminals. Please consult factory for details.

List Price Code:	
A = \$30	D = \$60
B = \$36	E = \$77
C = \$50	F = \$100

Cable Matrix

Table 15 SCANTEAM 3400 Models –X1, –X2 Primary Interfaces *continued*

Terminal Interface	3400–X1	3400–X2	Terminal ID	Cable Part No	Price Code	Notes
WYSE 325, 99 GT (EP) ANSI ASCII	•	•	15 14	42204479–01 EP 42204479–02 EP	D E	42204479–02 is 15 ft. extended length.
WYSE 370 (EP) ANSI ASCII Enhanced PC	•	•	15 14 18	42204479–01 EP 42204479–02 EP	D E	42204479–02 is 15 ft. extended length.
WYSE 520 (EP)	•	•	A1	42204479–01 EP 42204479–02 EP	D E	Requires Rev. 5.X software or higher. 42204479–02 is 15 ft. extended length.
Zenith Z-Note (Portable PC)	•	•	03	42204841–01	C	Enable Keyboard Style F.

EP = External Power Required – Power supply not included, priced separately

Not all foreign keyboards are supported in all terminals. Please consult factory for details.

List Price Code:	
A = \$30	D = \$60
B = \$36	E = \$77
C = \$50	F = \$100

Cable Matrix

Table 16 SCANTEAM 3400 Models –X3 Interfaces

Terminal Interface	3400–X3	Terminal ID	Cable Part No.	Price Code	Notes
DEC VT 220, 320, 330, 340, 420 (12V) §	•	04	42205154–01	E	
Fortronic POS 95	•	00	42205558–01	C	TX (Data from 3400) on Pin 2 of DB–9.
Fujitsu Team POS 5000	•	00	42204253–03 42204253–05 EP 42204253–22 EP	C E F	TX (Data from 3400) on Pin 2 of DB–9. 42204253–05 is 15 ft. extended length. 42204253–22 is 22 ft. extended length.
RS232 Serial Wedge (9 Pin “D” EP)	•	50	42204246–09 EP	F	
RS232 Serial Wedge (25 Pin “D” EP)	•	50	42204246–25 EP	F	
RS232 True Output (9 Pin “D” Male)	•	00	42204253–01◊	C	TX (Data from 3400) on Pin 2 of DB–9.
RS232 True Output (9 Pin “D” Male EP)	•	00	42204253–02 EP	D	TX (Data from 3400) on Pin 2 of DB–9.
RS232 True Output (9 Pin “D” Female)	•	00	42204253–03◊ 42204253–05 EP 42204253–22 EP	C E F	TX (Data from 3400) on Pin 2 of DB–9. 42204253–05 is 15 ft. extended length. 42204253–22 is 22 ft. extended length.
RS232 True Output (9 Pin “D” Female EP)	•	00	42204253–04 EP 42204253–05 EP 42204253–22 EP	D E F	TX (Data from 3400) on Pin 2 of DB–9. 42204253–05 is 15 ft. extended length. 42204253–22 is 22 ft. extended length.
RS232 True Output (25 Pin “D” Male)	•	00	42204254–01◊	C	TX (Data from 3400) on Pin 3 of DB–25.
RS232 True Output (25 Pin “D” Male EP)	•	00	42204254–02 EP	D	TX (Data from 3400) on Pin 3 of DB–25.
RS232 True Output (25 Pin “D” Female)	•	00	42204254–03◊	C	TX (Data from 3400) on Pin 3 of DB–25.
RS232 True Output (25 Pin “D” Female EP)	•	00	42204254–04 EP	D	TX (Data from 3400) on Pin 3 of DB–25.
RS232 True Output (9 Pin “D” Female) with integrated Mini Din Power Stealer.	•	00	42205896–01◊	D	TX (Data from 3400) on Pin 2 of DB–9. Plugs into PC external mouse or keyboard port.
RS232 True Output, Switched Power (9 Pin “D” Male)	•	00	42204748–01◊	C	Only supported by 3400/X–13X. TX (Data from 3400) on Pin 2 of DB–9.
RS232 True Output, Switched Power (9 Pin “D” Female)	•	00	42204748–02◊	C	Only supported by 3400/X–13X. TX (Data from 3400) on Pin 2 of DB–9.
RS232 True Output, Switched Power (25 Pin “D” Male)	•	00	42204748–03◊	C	Only supported by 3400/X–13X. TX (Data from 3400) on Pin 3 of DB–25.

EP = External Power Required – Power supply not included, priced separately
 § **DO NOT use SCANTEAM 3000 OR 5500 interface cables with the SCANTEAM 3400 Series.**
 ◊ 5V Host Power Only. For 12V host powered applications, contact Applications Support.

Not all foreign keyboards are supported in all terminals. Please consult factory for details.

List Price Code:	
A = \$30	D = \$60
B = \$36	E = \$77
C = \$50	F = \$100

Cable Matrix

Table 16 SCANTEAM 3400 Models –X3 Interfaces, *continued*

Terminal Interface	3400–X3	Terminal ID	Cable Part No.	Price Code	Notes
RS232 True Output, Switched Power (25 Pin "D" Female)	•	00	42204748-04↔	C	Only supported by 3400/X-13X. TX (Data from 3400) on Pin 3 of DB-25.
Siemens Nixdorf Beetle, RS232 Modes A & B	Use P/N 722201 (3400LR)		42204253-01↔	C	TX Pin 2 of 9 D male. Use Plug and Play Menu included with product for setup.

EP = External Power Required – Power supply not included, priced separately
 ↔ 5V Host Power Only. For 12V host powered applications, contact Applications Support.

Not all foreign keyboards are supported in all terminals. Please consult factory for details.

List Price Code:	
A = \$30	D = \$60
B = \$36	E = \$77
C = \$50	F = \$100

Cable Matrix

Table 17 SCANTEAM 3400 Model –X0 Interfaces

Terminal Interface	3400XX–X0	Cable Part No.	Price Code	Notes
HHLC +5V Input Cables				
Cherry Keyboard (Din–HHLC)	●	42204731–01	B	
Connect Air Wireless RF Transmitter	●	42204294–01	A	Industry standard HHLC power on pin 9. 6 ft. extended length.
Percon PT2000 (HHLC)	See Notes	42204294–01	A	Trigger unit only.
HHLC Decoders (9 Pin “D” Male Scanner Port) (HHLC – Hand Held Laser Compatible)	●	42203943–01	C	Application Specific, Power on Pin 4. 6 ft. extended length.
		42203943–02	C	Application Specific, Power on Pin 4. 6 ft. straight length.
		42203943–03	D	Application Specific, Power on Pin 4. 15 ft. extended length.
		42203943–05	E	Application Specific, Power on Pin 4. 22 ft. extended length.
		42204294–01	A	Industry Standard HHLC, Special Note! Power on Pin 9. 6 ft. extended length.
		42204294–02	C	Industry Standard HHLC, Power on Pin 9. 6 ft. straight length.
		42204294–03	D	Industry Standard HHLC, Power on Pin 9. 15 ft. extended length.
	42204294–05	E	Industry Standard HHLC, Power on Pin 9. 22 ft. extended length.	
	42204294–06	A	Industry Standard HHLC, Power on Pin 9. 6 ft. extended length (no good read signal).	
		42204294–07	C	Industry Standard HHLC, Power on Pin 9. 9 ft. extended length.
		42205251–01	A	For SCANTEAM 2350, 1100, 1200 (without start of scan).
Norand 2210 PDT	●	42205382–01	C	Recommend switched unit for maximum power conservation.
Norand 1700	●	42204294–01	A	Industry Standard HHLC, Power on Pin 9. 6 ft. extended length.
Symbol 3300 PDT	Use P/N 722195 (3400LR–10)	42205799–01	C	Industry Standard HHLC, Power on Pin 9 or 4. 6 ft. extended length. Application Specific. 5V only.
	Use P/N 722194 (3400HD–10)	42205799–01	C	Industry Standard HHLC, Power on Pin 9 or 4. 6 ft. extended length. Application Specific. 5V only.
Telxon 610, 710, 860 (HHLC)	●	42205379–01	A	8 Pin Modular.
HHLC +5V AutoTrigger Cables				
HHLC Decoders (9 Pin “D” Male Scanner Port) (HHLC – Hand Held Laser Compatible)	●	42205217–02	B	Convert manual trigger to AutoTrigger operation. Power on Pin 4.
		42205252–01		For SCANTEAM 1100, 1200, 2350 (without start of scan). Convert manual trigger to AutoTrigger operation. For 42205252–01 call factory for pricing and availability.
HHLC +12V Input Cables				
HHLC Decoders (9 Pin “D” Male Scanner Port) (HHLC – Hand Held Laser Compatible)	●	42205478–01	C	12V Input Power.

Application Specific: Check power requirements of interface before ordering.

Not all foreign keyboards are supported in all terminals. Please consult factory for details.

List Price Code:	
A = \$30	D = \$60
B = \$36	E = \$77
C = \$50	F = \$100

Cable Matrix

Table 18 SCANTEAM 3400PDF/HD, 3400PDF/LR –X2 Interfaces

Terminal Interface	3400PDF–X2	Terminal ID	Cable Part No	Price Code	Notes
AcerNote 950C (Portable PC)	•	03	42204841–01	C	After scanner is programmed, press Enter on AcerNote 950C. Enable Keyboard Style F.
ADDS 4000/110, 4000/160, 4000/260	•	03	42205543–01	D	
Compaq Contura 410 (Portable PC)	•	03	42204841–01	C	Enable Keyboard Style F.
DDC IS 386, IS 386E, IS 387, IS 387C, IS 486	•	07	42204061–02 EP 42204061–03 42204061–04 EP	E A D	Depending on terminal accessories, external power may be required. 42204061–02 is 15 ft. extended length.
DEC PC 433 SE (Portable PC)	•	03	42204841–01	C	Enable Keyboard Style F.
DEC VT510, 520, 525 (PC Style)	•	05	42204062–02 EP 42204062–03	E A	42204062–02 is 15 ft. extended length.
Dell Latitude (Portable PC)	•	03	42204841–01	B	Enable Keyboard Style F.
DTK-486 SLC (Portable PC)	•	03	42204841–01	C	Enable Keyboard Style F.
Esprit 200, 400	•	05	42204062–02 EP 42204062–03 42204062–04 EP	E A D	Depending on terminal accessories, external power may be required. External power required for AutoTrigger. 42204062–02 is 15 ft. extended length.
Fujitsu Stylistic (Portable PC)	•	03	42204841–01	C	Fujitsu needs BIOS revision 1.16 or higher. Enable Keyboard Style F.
HP Vectra (Din)	•	03	42204061–02 EP 42204061–03 42204061–04 EP	E A D	Depending on terminal accessories, external power may be required. 42204061–02 is 15 ft. extended length.
HP Vectra (Mini Din)	•	03	42204062–02 EP 42204062–03 42204062–04 EP	E A D	Depending on terminal accessories, external power may be required. 42204062–02 is 15 ft. extended length.
IBM 3151, 3471, 3472, 3476, 3477	•	06 (102 key) See notes for 122 key	42204064–01 42204064–02 EP 42204064–15 EP	D E	Terminal IDs for 122 key: 07 (3471/72, 122 key) 08 (3476/77, 122 key) 42204064–15 is 15 ft. extended – call factory for pricing and availability.
IBM 3153	•	03	42205543–01	D	

EP = External Power Required – Power supply not included, priced separately

Not all foreign keyboards are supported in all terminals. Please consult factory for details.

List Price Code:	
A = \$30	D = \$60
B = \$36	E = \$77
C = \$50	F = \$100

Cable Matrix

Table 18 SCANTEAM 3400PDF/HD, 3400PDF/LR –X2 Interfaces *continued*

Terminal Interface	3400PDF–X2	Terminal ID	Cable Part No	Price Code	Notes
IBM 3161, 3162, 3163, 3179, 3191, 3192, 3194, 3196, 3197	•	06 (102 key) See notes for 122 key	42204089–01 42204089–15 EP	D	Terminal IDs for 122 key: 07 (3191/92, 122 key) 08 (3196/97, 122 key) 42204089–15 is 15 ft. extended - call factory for pricing and availability.
IBM 3482, 3486, 3488	•	06 (102 key) 08 (122 key)	42204064–01 42204064–02 EP 42204064–15 EP	D E	42204064–15 is 15 ft. extended – call factory for pricing and availability.
IBM 3487	•	08 (122 key)	42204064–01 42204064–02 EP 42204064–15 EP	D E	42204064–15 is 15 ft. extended – call factory for pricing and availability.
IBM AT/XT/PS2 Series Combo	•		42204868–09 42204868–01 EP	B D	Interchangeable cable on mini Din or Din – PC’s and PS/2. Depending on terminal accessories, external power may be required. See SCANTEAM 3400 Decoded Out Operating Guide and Programming Menu for terminal ID.
IBM AT/PS2 Compatible (Mini Din) Keyboard Emulation – Non Wedge	•	03	42204841–01	C	This feature was previously supported in P/N522080, but is now part of standard product with firmware 4.0 or above. Additional programming required. Refer to the SCANTEAM 3400 User’s Guide.
IBM AT Compatible (Din) Keyboard Emulation – Non Wedge	•	03	42205294–01	D	This feature was previously supported in P/N522080, but is now part of standard product with firmware 4.0 or above. Additional programming required. Refer to the SCANTEAM 3400 User’s Guide.
IBM PC Clones (Din)	•	03 (See Notes)	42204061–02 EP 42204061–03 42204061–04 EP	E A D	Refer to Table 43 (Page 118) for examples of supported PCs. 42204061–02 is 15 ft. extended length.
IBM PC Clones (Mini Din)	•	03 (See Notes)	42204062–02 EP 42204062–03 42204062–04 EP	E A D	Refer to Table 43 (Page 118) for examples of supported PCs. 42204062–02 is 15 ft. extended length.
IBM AT (Din)	•	03	42204061–02 EP 42204061–03 42204061–04 EP	E A D	Refer to Table 43 (Page 118) for examples of supported PCs. 42204061–02 is 15 ft. extended length.
IBM AT (Mini Din)	•	03	42204062–02 EP 42204062–03 42204062–04 EP	E A D	Refer to Table 43 (Page 118) for examples of supported PCs. 42204062–02 is 15 ft. extended length.
IBM PS/2 30–286, 50, 55SX, 60, 70, 70–061, 70–121, 80 (Mini Din)	•	03	42204062–02 EP 42204062–03 42204062–04 EP	E A D	Also supports Unix X–Windows versions. Depending on terminal accessories, external power may be required. 42204062–02 is 15 ft. extended length.

EP = External Power Required – Power supply not included, priced separately

Not all foreign keyboards are supported in all terminals. Please consult factory for details.

List Price Code:	
A = \$30	D = \$60
B = \$36	E = \$77
C = \$50	F = \$100

Cable Matrix

Table 18 SCANTEAM 3400PDF/HD, 3400PDF/LR –X2 Interfaces *continued*

Terminal Interface	3400PDF–X2	Terminal ID	Cable Part No	Price Code	Notes
IBM PS/2 25, 30, 77DX2 (Mini Din)	•	02	42204062–02 EP 42204062–03 42204062–04 EP	E A D	Also supports Unix X–Windows versions. Depending on terminal accessories, external power may be required. 42204062–02 is 15 ft. extended length.
IBM Thinkpad 365, 755 CV (Portable PC)	•	03	42205606–01	B	Enable Keyboard Style F.
I/O 2676D, 2677C, 2677D	•	08 (122 key)	42204062–02 EP 42204062–03 42204062–04 EP	E A D	Depending on terminal accessories, external power may be required. 42204062–02 is 15 ft. extended length.
ITT 9271	•	07	42204836–01	D	
Lee Data IIS	•	07	42204061–02 EP 42204061–03 42204061–04 EP	E A D	Depending on terminal accessories, external power may be required. 42204061–02 is 15 ft. extended length.
Midwest Micro Elite TS 30PS (Portable PC)	•	03	42204841–01	C	Enable Keyboard Style F.
Mitac 4022 (Portable PC)	•	03	42204841–01	C	Enable Keyboard Style F if no external keyboard is present.
NCR 2920	•	03	42205543–01	D	
Olivetti M240, M250, M290, M380, P500	•	03	42204062–02 EP 42204062–03 42204062–04 EP	E A D	Depending on terminal accessories, external power may be required. 42204062–02 is 15 ft. extended length.
Relisys TR 175 Terminal (Din)	•	03	42204061–02 EP 42204061–03	E A	42204061–02 is 15 ft. extended length.
RS232 TTL Output (9 Pin “D” Male)	•	00	42203758–01	C	TX (Data from 3400) on Pin 2 of DB–9.
RS232 TTL Output (9 Pin “D” Male EP)	•	00	42203758–02 EP	D	TX (Data from 3400) on Pin 2 of DB–9.
RS232 TTL Output (9 Pin “D” Female)	•	00	42203758–03	C	TX (Data from 3400) on Pin 2 of DB–9.
RS232 TTL Output (9 Pin “D” Female EP)	•	00	42203758–04 EP	D	TX (Data from 3400) on Pin 2 of DB–9.
RS232 TTL Output (25 Pin “D” Male)	•	00	42203759–01	C	TX (Data from 3400) on Pin 3 of DB–25.
RS232 TTL Output (25 Pin “D” Male EP)	•	00	42203759–02 EP	D	TX (Data from 3400) on Pin 3 of DB–25.
RS232 TTL Output (25 Pin “D” Female)	•	00	42203759–03	C	TX (Data from 3400) on Pin 3 of DB–25.
RS232 TTL Output (25 Pin “D” Female EP)	•	00	42203759–04 EP	D	TX (Data from 3400) on Pin 3 of DB–25.

EP = External Power Required – Power supply not included, priced separately

Not all foreign keyboards are supported in all terminals. Please consult factory for details.

List Price Code:	
A = \$30	D = \$60
B = \$36	E = \$77
C = \$50	F = \$100

Cable Matrix

Table 18 SCANTEAM 3400PDF/HD, 3400PDF/LR –X2 Interfaces *continued*

Terminal Interface	3400PDF–X2	Terminal ID	Cable Part No	Price Code	Notes
SiliconGraphics Indy, IndigoII	•	05	42204062–02 EP 42204062–03 42204062–04 EP	E A D	42204062–02 is 15 ft. extended length.
Sun River Data Systems, ADDS 4000/110, 4000/160, 4000/260	•	03	42205543–01	D	
Televideo 990, 995, 9060	•	02	42204062–02 EP 42204062–03	E A	42204062–02 is 15 ft. extended length.
Telex 078, 078A, 79, 80, 191, 196, 1191, 1192, 1471, 1472, 1476, 1477, 1483	•	25 (88 key)	42204061–02 EP 42204061–03 42204061–04 EP	E A D	Depending on terminal accessories, external power may be required. 42204061–02 is 15 ft. extended length.
Telex 078, 078A, 79, 80, 191, 196, 1191, 1192, 1471, 1472, 1476, 1477, 1483	•	45 (102 key)	42204061–02 EP 42204061–03 42204061–04 EP	E A D	Depending on terminal accessories, external power may be required. 42204061–02 is 15 ft. extended length.
Telex 078, 078A, 79, 80, 191, 196, 1191, 1192, 1471, 1472, 1476, 1477, 1482, 1483	•	46 (122 key)	42204061–02 EP 42204061–03 42204061–04 EP	E A D	Depending on terminal accessories, external power may be required. 42204061–02 is 15 ft. extended length.
Telex 1151	•	45 (102 key) See notes for 122 key	42204061–02 EP 42204061–03 42204061–04 EP	E A D	Depending on terminal accessories, external power may be required. Terminal ID for 122 key: 46. 42204061–02 is 15 ft. extended length.
Telxon 610, 710, 860 (HHLC)	•		42205380–01	C	Secondary Interface. 8 Pin Modular Connector.
Texas Instruments Extensa 560CD (Portable PC)	•	03	42204841–01	C	Enable Keyboard Style F.
Toshiba Satellite T1960, T2130 CS (Portable PC)	•	03	42204841–01	C	Enable Keyboard Style F.
Toshiba 2600 (Portable PC)	•	03	42204841–01	C	Enable Keyboard Style F.
Visa Link MP500, MP600 (EP)	•	03	42204062–02 EP 42204062–04 EP	E D	For 104 key keyboards with 12 function keys. 42204062–02 is 15 ft. extended length.
Wand Emulation Code 39	•	61	42203764–01 42203764–04 42203764–03 42203764–05	C C C C	Special Note! Power on Pin 4. 7 ft. extended length. Special Note! Power on Pin 4. 16 ft. extended length. Special Note! Power on Pin 9. 7 ft. extended length. Special Note! Power on Pin 9. 16 ft. extended length.

EP = External Power Required – Power supply not included, priced separately

Not all foreign keyboards are supported in all terminals. Please consult factory for details.

List Price Code:	
A = \$30	D = \$60
B = \$36	E = \$77
C = \$50	F = \$100

Cable Matrix

Table 18 SCANTEAM 3400PDF/HD, 3400PDF/LR –X2 Interfaces *continued*

Terminal Interface	3400PDF–X2	Terminal ID	Cable Part No	Price Code	Notes
Wand Emulation Native/Same Code	•	64	42203764–01	C	Special Note! Power on Pin 4. 7 ft. extended length.
			42203764–04	C	Special Note! Power on Pin 4. 16 ft. extended length.
			42203764–03	C	Special Note! Power on Pin 9. 7 ft. extended length.
			42203764–05	C	Special Note! Power on Pin 9. 16 ft. extended length.
Zenith Z-Note (Portable PC)	•	03	42204841–01	C	Enable Keyboard Style F.

EP = External Power Required – Power supply not included, priced separately

Not all foreign keyboards are supported in all terminals. Please consult factory for details.

List Price Code:
 A = \$30 D = \$60
 B = \$36 E = \$77
 C = \$50 F = \$100

Cable Matrix

Table 19 SCANTEAM 3400PDF/HD, 3400PDF/LR –X3 Interfaces for True RS-232

Terminal Interface	3400PDF–X3	Terminal ID	Cable Part No.	Price Code	Notes
RS232 True Output (9 Pin "D" Male)	●	00	42205784-01◇	C	TX (Data from 3400) on pin 2 of DB9.
RS232 True Output (9 Pin "D" Male EP)	●	00	42205784-02 EP	D	TX (Data from 3400) on pin 2 of DB9.
RS232 True Output, (9 Pin "D" Female)	●	00	42205784-03◇	C	TX (Data from 3400) on pin 2 of DB9.
RS232 True Output (9 Pin "D" Female EP)	●	00	42205784-04 EP	D	TX (Data from 3400) on pin 2 of DB9.
RS232 True Output (9 Pin "D" Male EP)	●	00	42205784-05 EP	F	TX (Data from 3400) on pin 2 of DB9. 15 ft. extended length.
RS232 True Output (9 Pin "D" Female EP)	●	00	42205784-06 EP	F	TX (Data from 3400) on pin 2 of DB9. 15 ft. extended length.
RS232 True Output, Switched Power (9 Pin "D" Male)	●	00	42205786-01◇	C	TX (Data from 3400) on pin 2 of DB9.
RS232 True Output, Switched Power (9 Pin "D" Female)	●	00	42205786-02◇	C	TX (Data from 3400) on pin 2 of DB9.
RS232 True Output, (25 Pin "D" Male)	●	00	42205791-01	C	TX (Data from 3400) on pin 3 of DB25.
RS232 True Output, (25 Pin "D" Male EP)	●	00	42205791-02 EP	D	TX (Data from 3400) on pin 3 of DB25.
RS232 True Output (25 Pin "D" Female)	●	00	42205791-03◇	C	TX (Data from 3400) on Pin 3 of DB-25.
RS232 True Output (25 Pin "D" Female EP)	●	00	42205791-04 EP	D	TX (Data from 3400) on Pin 3 of DB-25.
RS232 True Output (25 Pin "D" Male EP)	●	00	42205791-05 EP	F	TX (Data from 3400) on Pin 3 of DB-25. 15 ft. extended length.
RS232 True Output (25 Pin "D" Female EP)	●	00	42205791-06 EP	F	TX (Data from 3400) on Pin 3 of DB-25. 15 ft. extended length.
RS232, Switched Power (25 Pin "D" Male)	●	00	42205786-03◇	C	TX (Data from 3400) on pin 3 of DB25.
RS232, Switched Power (25 Pin "D" Female)	●	00	42205786-04◇	C	TX (Data from 3400) on pin 3 of DB25.

EP = External Power Required – Power supply not included, priced separately
 ◇ 5V Host Power Only. For 12V host powered applications, contact Applications Support.

Not all foreign keyboards are supported in all terminals. Please consult factory for details.

List Price Code:	
A = \$30	D = \$60
B = \$36	E = \$77
C = \$50	F = \$100

Cable Matrix

Table 20 SCANTEAM 3400 Models –X1, –X2 Secondary Interfaces

Terminal Interface	3400–X1	3400–X2	Cable Part No	Price Code	Notes
HHLC	•	•	42204606–01	C	Special Note! Power on Pin 9. 6 ft. extended length. 42205380–01 is for Telxon 610, 710, 860. 8 Pin Modular. 42205592–01 is for Computer Identics 420/425/426.
			42205380–01	C	
			42205592–01	D	
RS232 TTL Output	•	•	42204747–01	C	Special Note! 9 Pin "D" Male. Special Note! 9 Pin "D" Female. Special Note! 25 Pin "D" Male. Special Note! 25 Pin "D" Female.
			42204747–02	C	
			42204747–03	C	
			42204747–04	C	
Wand Emulation (Code 39 or Same Code)	•	•	42204884–01	C	Special Note! Power on Pin 4. Special Note! Power on Pin 9. Special Note! Power on Pin 9. Required for wake up feature of scanner. Intermec 94XX Series. Output polarity must be programmed for white high. Intermec 97XX series. Output polarity must be programmed for white high. Intermec Trakker Antares 248X series. Symbol LL500 (OmniLink).
			42204884–02	C	
			42204884–03	C	
			42205191–01	B	
			42205192–01	C	
42205337–01	D				

☞ The following conditions must be met to perform a secondary interface:

- 1) The unit must be menued for the desired secondary interface. (See SCANTEAM 3400 Decoded Out Operating Guide and Programming Menu for instructions.)
- 2) The unit must be connected to the proper secondary cable.

Scanners equipped with a manual trigger may be programmed for switched power for maximum power conservation.

ST3400PDF scanners do not support secondary interfaces.

Table 21 SCANTEAM 3400 Companion Cables

Companion Interface Cable	Cable Description	Cable Part No.	Price Code	Notes
Bar Image/Wand Emulation Extension Cable	15 ft. straight through cable. 9 pin squeeze female to 9 pin male with tabs.	42204837–01	B	Can be used as Bar Image for –X0 undecoded out or wand emulation for –X1 or –X2 models. Refer to the SCANTEAM 3400 Decoded Out Operating Guide and Programming Menu for wand emulation programming.
Cloning Cable (EP)	For copying one unit's firmware into another.	42204559–01 EP	F	For 3400HD/LR–X1, –X2, –X3 only.
Personal Computer Power Adapter	Male to Female (Mini Din) with power pigtail.	PCPower/MD4	\$15.00	Obtains +5VDC (for 3400HD or 3400LR) from the mouse or (4 Pin Mini Din) keyboard port of a PC without interfering with the operation of the mouse or keyboard.
Personal Computer Keyboard Connector Adapter	Regular Din to Mini Din Conversion.	31203935–01	A	

EP = External Power Required – Power supply not included, priced separately

Not all foreign keyboards are supported in all terminals. Please consult factory for details.

List Price Code:	
A = \$30	D = \$60
B = \$36	E = \$77
C = \$50	F = \$100

