

## CCD Scanner

### Features

- Easy to use
- Quick and easy install
- Fast and flexible data entry
- Durable
- CCD Technology
- Programmable

### Benefits

- The CCD scanner comes ready to scan out of the box. No other software or drivers needed.
- Simply plug the scanner between your keyboard and PC. That's it! Start scanning immediately. (Optional USB interface).
- Scan bar codes into your DOS, Windows 3.1, 9x, 2000, ME, XP and NT applications.
- No moving parts equals less down time.
- Scans professional and poorly printed bar codes with ease.
- Easily add pre/postamble functions after your scans.



# CCD Scanner Specifications

## PERFORMANCE

**Depth of Field**  
Contact to 1.5"

**Best Resolution**  
5mil

**Scanning Width**  
3.25"

**Scan Rate**  
50 scans/second

## ELECTRICAL

**Light Source**  
660nm CCD Array

**Operating Voltage**  
5V

**Current Consumption**  
5VDC

## MECHANICAL

**Dimensions**  
7.5" x 3.25" x 1.875"

**Weight**  
6.4 oz

**Cable**  
8' straight

**Mechanical Shock**  
High impact plastic

## ENVIRONMENTAL

**Operating Temperature**  
32°F to 122°F

**Storage Temperature**  
-22°F to 158°F

**Relative Humidity**  
20% to 85%

**Safety Certification**  
FCC Class A

## INTERFACES





Keyboard wedge

USB optional

## SYMBOLOGIES

Code 39, Code 128, UCC-128,  
UPC-A, UPC-E, EAN/JAN-8,  
EAN/JAN-13, Interleaved 2 of 5,  
Codabar, MSI Plessey

## OUTER DIMENSIONS

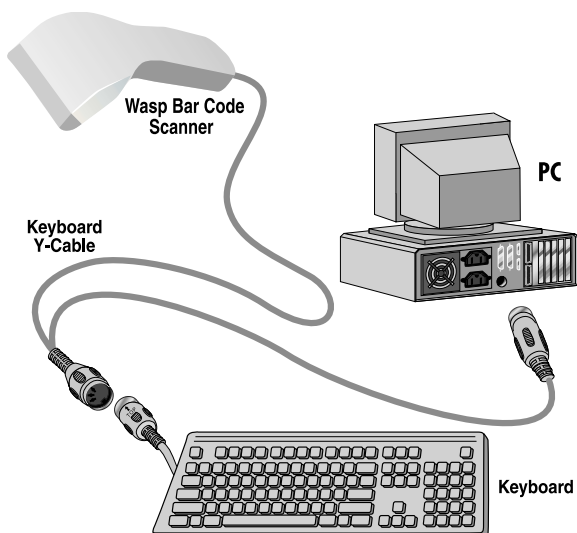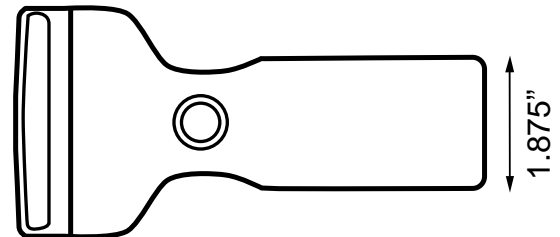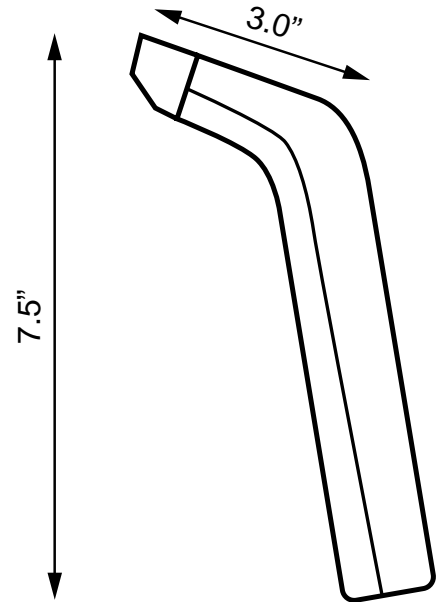

## **Wasp Technologies**

1400 10th Street  
Plano, TX 75074  
214-547-4100 • Fax: 214-547-4101  
[www.waspbarcode.com](http://www.waspbarcode.com)