



DSU III AR

ALL-RATE DSU/CSU

PRODUCT FEATURES

- Support for rates from 2.4 to 64 kbps including 19.2 and 38.4 kbps
- Standalone or Smart 16/16e shelf rackmount versions
- Compatible with DDS secondary channel services; provides asynchronous secondary channel rates of 75 bps to 2.4 kbps
- Local and remote configuration (AT, front panel, V.25 bis)
- Synchronous or asynchronous (including 57.6 kbps) primary channel modes of operation
- Both EIA-232 and V.35 primary channel DTE interfaces
- DTE-to-service rate matching feature allows slower DTE devices to communicate over higher speed service offerings
- Manual, DTR Dial, AT commands, V.25 bis, or stored number dialing capabilities
- Auto answer of incoming calls
- Standard 5 year warranty

The ADTRAN DSU III AR is a technologically advanced, high performance data service unit/channel service unit (DSU/CSU). This unit provides a reliable interface between the digital data service (DDS) or 4-wire Switched 56 (SW56) network and the customer's data terminal equipment (DTE). The unit is an all-rate DSU/CSU supporting synchronous and asynchronous data rates on the primary channel and asynchronous data rates on the secondary channel. The synchronous primary channel rates supported are 2.4, 4.8, 9.6, 19.2, 38.4, 56, and 64 kbps. Asynchronous data rates supported are 2.4, 4.8, 9.6, 19.2, 38.4 and 57.6 kbps. Secondary channel data rates of 75, 150, 300, 600, 1200, and 2400 bps are offered depending upon the primary channel rate.


The DTE interface can be selected as either EIA-232 or V.35 for all data rates. The secondary channel interface is EIA-232 and is accessed through a separate connector.

Additional features of the DSU III AR include a DTE-to-service rate matching feature for both dedicated and switched modes, as well as various anti-streaming time-out values, to disable streaming terminals on a multi-point circuit. Private networks and modem tail circuits are accommodated through clocking/timing options.

In the 4-wire SW56 mode, dialing options include manual dialing, redialing, and dialing of stored numbers. Dialing over the DTE interface is supported by use of an AT command set or the V.25 bis in-band dialing protocol.

The unit responds to standard loopback commands from the telephone company central office. In addition, the user has several built-in test capabilities. These include V.54 remote loopback, 2047 and 511 BERT test patterns, and four DDS stress patterns (results of which are displayed on a two-line by 16-character LCD display and seven LEDs). The standalone unit's front panel keypad supports setup, selection of test modes, local and remote configuration, manual dialing, or automatic dialing from stored numbers.

The rackmount unit can be configured through the Smart 16/16e shelf controller card, from a local/remote VT 100 terminal or from an ADTRAN DATAMATE. The DSU III AR can also be configured using AT or V.25 bis commands. A DC version of the standalone unit is also available. The DSU III AR dc supports all the functionality of the DSU III AR, except secondary channel.

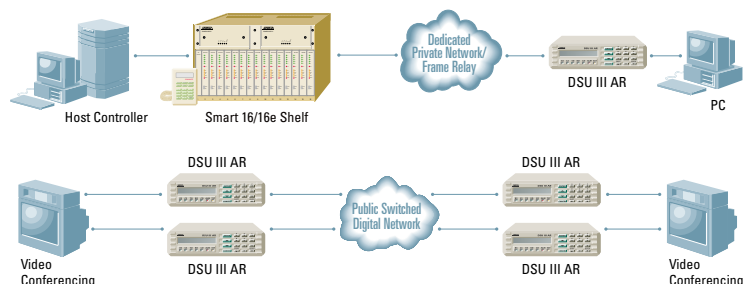

CORPORATE OFFICE

ADTRAN, Inc.
901 Explorer Boulevard
P.O. Box 140000
Huntsville, AL 35814-4000

800 9ADTRAN
256 963-8000
fax: 256 963-8699
fax back: 256 963-8200
e-mail: info@adtran.com
web site: www.adtran.com

REGIONAL OFFICES

Chicago, IL 800 436-4217
Seattle, WA 800 390-1573
Washington, DC 800 794-9798

FIELD OFFICES

Atlanta, GA 800 289-0966
Chicago, IL 800 471-8655
Columbus, OH 888 865-2237
Dallas, TX 800 471-8648
Denver, CO 800 471-8651
Irvine, CA 800 788-5408
Kansas City, KS 800 471-8649
Los Angeles, CA 888 223-7668
Nashville, TN 888 223-7657
New York, NY 800 471-8657
Portland, OR 888 223-7660
Richmond, VA 800 689-9915
San Jose, CA 888 223-7655

INTERNATIONAL CONTACTS

Asia Pacific/Australia
852-2824-8283 (Hong Kong)

Canada
800 232-6811

Caribbean/Latin America
954 746-5355

All other International inquiries
256 963-2500



I.S. EN ISO 9001

ADTRAN is an ISO 9001 registered company.



Printed in the U.S.A. on recycled paper.
61202011L1-8F November 1998
©1998 ADTRAN, Inc. All rights reserved.

Product Specifications

OPERATING MODES

- Dedicated DDS (point-to-point, multi-point)
- Switched 56 (4-Wire)

NETWORK DATA RATES

- *Dedicated mode service rates:* 2.4, 4.8, 9.6, 19.2, 38.4, 56 and 64 kbps.
- *Switched mode service rate:* 56 kbps

DTE RATES

- DTE-to-loop rate matching in both dedicated and switched modes
- *Synchronous rates:* 2.4, 4.8, 9.6, 19.2, 38.4, 56, and 64 kbps
- *Asynchronous rates:* 2.4, 4.8, 9.6, 19.2, 38.4, and 57.6 kbps

DTE INTERFACE

- Both EIA-232 and V.35 electrical and physical primary channel DTE interfaces
- EIA-232 secondary channel interface

SWITCHED MODE DIALING OPTIONS

- Stored number
- Front panel keypad (standalone only)
- DTR dialing of stored number
- In-band AT commands
- V.25 bis in-band dialing

DATA BUFFERING

- Internal slack buffer

CLOCKING

- Normal DDS or private network tributary (slaved to network receive clock)
- Private network master (internal)
- Normal DDS with tail circuit
- Private network master (slaved to external clock)

DIAGNOSTICS

Network

- CSU and DSU loopbacks

User

- Local DTE and loop
- Remote V.54

Test patterns

- 2047, 511, DDS stress patterns 1-4

RECEIVER SENSITIVITY

- -45 dB at all rates

AGENCY APPROVALS

- FCC Part 15, Class A
- FCC Part 68
- Industry Canada CS03
- UL and CUL

ENVIRONMENT

Operating

- 0° to 50°C (32° to 122°F)

Storage

- -20° to 70°C (-4° to 158°F)

Relative Humidity

- Up to 95%, non-condensing

PHYSICAL

Dimensions

- *Standalone:* 2.25" H, 8.75" W, 10.25" D
- *Rackmount:* 1" H, 6.75" W, 10.50" D
- *Standalone (dc):* 2.4" H, 8" W, 10.4" D

WEIGHT

Standalone

- 3 lbs

Rackmount

- 1.5 lbs

POWER

AC Standalone

- 115 VAC, 60 Hz, 8 watts

DC Standalone


- 24-48 VDC, 8 watts

Ordering Information

EQUIPMENT

PART

DSU III AR standalone1202011L1
DSU III AR rackmount1200034L1
DSU III AR dc standalone1200270L1

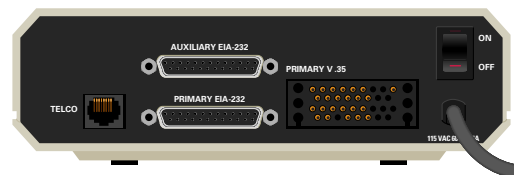

Specifications subject to change without notice.