



# TSU LT

## FULL FEATURED T1/FT1 DSU/CSU

### PRODUCT FEATURES

- Single V.35 DTE interface
- Nx56 or Nx64 operation for data rates to 1.536 Mbps
- Auto and Manual D4(SF) or ESF framing support
- B8ZS or AMI line coding
- Easy to use front panel keypad for unit configuration and monitoring
- Remote TSU LT configuration via FDL or 8k in-band
- Local and remote loopback capability
- Extensive built in test capabilities
- Support for T-Watch PRO™ software for optional PC based configuration
- Standard 5 year warranty


The ADTRAN TSU LT is a low cost, full-featured T1/FT1 Data Service/Channel Service Unit (DSU/CSU). The TSU LT provides an interface between T1 or Fractional T1 service and the end user's Data Terminal Equipment (DTE) for applications such as LAN to LAN bridging, Frame Relay circuit termination and videoconferencing. The TSU LT provides access to traditional dedicated point-to-point T1 services as well as network termination for Frame Relay.

Housed in a compact, durable plastic housing the TSU LT supports synchronous data rates from 56 kbps to 1.536 Mbps at Nx56 or Nx64 kbps. A single V.35 physical interface provides a connection to the end user's DTE equipment.

For configuration and testing, the TSU LT provides the capability to control a remote TSU LT through the T1 FDL channel. If the FDL channel is unavailable, the TSU LT can use 8 kbps of the data traffic to provide configuration and control of the remote unit. The in-band control channel is used on an as needed basis and is automatically controlled by the TSU LT.

The TSU LT responds to standard local and remote loopback commands from the telephone company central office. In addition, the user has several built-in test capabilities including V.54 remote loopback and 511 BERT test patterns. Complete configuration and performance data is available from the front panel keypad and two-line by 16 character LCD display. For additional configuration and monitoring options, the TSU LT supports a VT100 terminal configuration and control mode which is available through the control port. For direct serial connections or for remote devices, optional Windows® based PC Management is available through the comprehensive, easy to use T-Watch PRO™ software package.

ADTRAN provides several T1 DSU/CSUs for a variety of customer applications. Additional products in the TSU family include the TSU, TSU ESP, TSU100, TSU120, TDU120 and the TSU600. These T1/FT1 DSU/CSUs offer flexibility, modularity and end user configuration. The modular approach allows the ADTRAN TSU family to serve in point to point T1 applications with a mixture of voice, data and video.

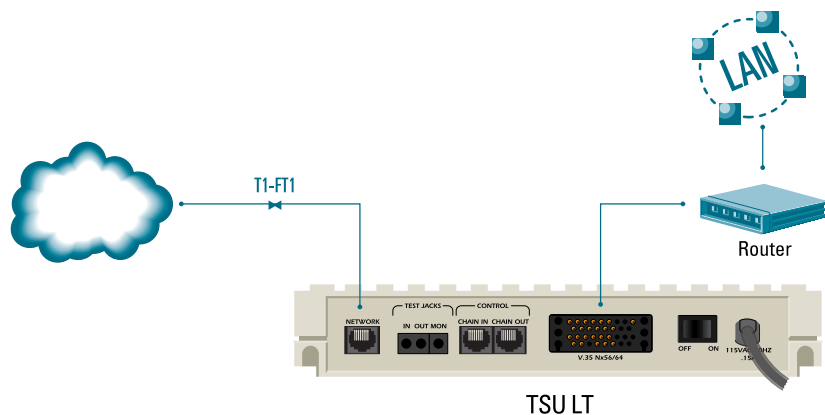

## CORPORATE OFFICE

ADTRAN, Inc.  
901 Explorer Boulevard  
P.O. Box 140000  
Huntsville, AL 35814-4000

800 9ADTRAN  
256 963-8000  
fax: 256 963-8699  
fax back: 256 963-8200  
e-mail: info@adtran.com  
web site: www.adtran.com

## REGIONAL OFFICES

Chicago, IL 800 436-4217  
Seattle, WA 800 390-1573  
Washington, DC 800 794-9798

## FIELD OFFICES

Atlanta, GA 800 289-0966  
Chicago, IL 800 471-8655  
Columbus, OH 888 865-2237  
Dallas, TX 800 471-8648  
Denver, CO 800 471-8651  
Irvine, CA 800 788-5408  
Kansas City, KS 800 471-8649  
Los Angeles, CA 888 223-7668  
Nashville, TN 888 223-7657  
New York, NY 800 471-8657  
Portland, OR 888 223-7660  
Richmond, VA 800 689-9915  
San Jose, CA 888 223-7655

## INTERNATIONAL CONTACTS

Asia Pacific/Australia  
852-2824-8283 (Hong Kong)

Canada  
800 232-6811

Caribbean/Latin America  
954 746-5355

All other International inquiries  
256 963-2500



I.S. EN ISO 9001

ADTRAN is an ISO 9001 registered company.



Printed in the U.S.A. on recycled paper.  
61202192L1-8B August 1998  
©1998 ADTRAN, Inc. All rights reserved.

# Product Specifications

## NETWORK INTERFACE

- Line Rate: T1/FT1 (1.544 Mbps)

## PHYSICAL INTERFACE

- RJ48C: 8-Pin Modular

## FRAMING

- SF/ESF
- Auto Detection

## ESF FORMAT

- AT&T 54016
- ANSI T1.403

## LINE CODE

- AMI/B8ZS

## INPUT SIGNAL

- 0 to -36dB

## DSO ASSIGNMENT

- Contiguous
- Alternating

## T1 TRANSMIT TIMING

- Loop Timed
- Internal
- DTE

## DTE INTERFACE

- Bit Rate: 56 kbps to 1.536 Mbps, Nx56 or Nx64 kbps (N=1 to 24)

## ELECTRICAL

- CCITT V.35

## MECHANICAL

- V.35 (Winchester Type 34 pin)

## DTE TRANSMIT CLOCK

- Automatic

## PERFORMANCE MONITOR

### PERFORMANCE DATA

- BPVs/CRCs, ES, SES, UAS, % AS, % EFSEC, Alarms, Errors

## REPORTS

- NI information stored for last 24 hours in 15 minute increments

## PRMS

- ANSI Performance Report Messages (User selectable)

## TESTS

- Local: Payload/Line Loopback, DTE Loopback
- Remote: Payload/Line Loopback, V.54 (DTE) Loopback
- Network: CSU and DSU loopbacks

## BUILT-IN TEST PATTERNS

- 511 (active DS0s) with error insert available
- 1:8 (all DS0s)
- All 1's (all DS0s)
- All 0's (all DS0s)

## AGENCY APPROVALS

- FCC part 15, Class A, FCC Part 68, Industry Canada CS03, UL, CUL

## ENVIRONMENT

- Operating: 0 to 50 °C (32 to 122 °F)
- Storage: -20 to 70 °C (-4 to 158 °F)
- Relative Humidity: Up to 95%, non-condensing

## PHYSICAL

- Dimensions: 1.5" H, 6.25" D, 9.0" W
- Weight: 2 lbs.
- Power: 115VAC, 60Hz, 5W

# Ordering Information

## EQUIPMENT

TSU LT

## PART #

1202060L1

Specifications subject to change without notice.

T-Watch PRO is a trademark of ADTRAN, Inc.  
Windows is a registered trademark of Microsoft Corporation

