



LS2200

Ultra Compact Laser Scanner

FEATURES

- Scanning speed up to **2,000 scans/sec**
- Very High density code reading (up to 0.076 mm, 3 mils)
- Ultra compact dimensions 50x40x28 mm (1.97x1.57x1.10 in)
- Lightweight 150 g (5.29 oz)
- 4 status LEDs
- IP65 rugged industrial housing

APPLICATIONS

- High speed
 - Document handling machines
 - Packaging machines
 - Printing verification

GENERAL DESCRIPTION

OEMs have been searching for a device able to solve the fastest applications on the market.

Datalogic's **LS2200** overcomes today's speed limits by performing up to **2,000 scans/sec**, more than twice as the average of actual scanners.

In addition to this amazing feature, **LS2200** integration into automated equipment is very easy thanks to its miniature dimensions and light weight.

The **LS2200** can adapt its gain and digitizer parameters, thus improving scanning performance on very high density codes (up to 0.076 mm, 3 mils). It is also possible to select a different speed to scan damaged or poorly printed barcodes, getting better reading results.

High reliability, cost effectiveness, great scanning performance, along with industrial quality standards are additional winning points for OEM manufacturers who choose the **LS2200** to improve their machine performance.

The **LS2200** can be connected to all Datalogic industrial decoders.




MODELS

MODEL	DESCRIPTION	ORDER NO.
LS2200-1000	Standard resolution, linear	930111000
LS2200-1010	Standard resolution, raster R1	930111010
LS2200-2000	High resolution, linear	930111020
LS2200-2010	High resolution, raster R1	930111030


SPECIFICATIONS

POWER SUPPLY	10 to 30 VDC
POWER CONSUMPTION	2 W
LIGHT SOURCE	Visible laser diode (650 nm)
MAX. RESOLUTION	1xxx models 0.15 mm (6 mils) 2xxx models 0.10 mm (4 mils) (up to 0.076 mm, 3 mils)
MAX. READING DISTANCE	1xxx models 230 mm (9.1 in) on 0.60 mm (24 mils) code resol. 2xxx models 115 mm (4.5 in) on 0.30 mm (12 mils) code resol.
MAX. DEPTH OF FIELD	1xxx models 180 mm (7.1 in) on 0.60 mm (24 mils) code resol. 2xxx models 85 mm (3.7 in) on 0.30 mm (12 mils) code resol.
APERTURE ANGLE	60 degrees (8 mirrors rotor)
RASTER APERTURE	15 mm (0.6 in) at 230 mm (9.1 in) for XX1X models
SCANNING SPEED	1,000 scans/sec standard (Up to 2,000 scans/sec)
INPUT SIGNALS	Scanning speed selection (Half/Full) digital input Code Density Optimization (High/standard) digital input Scanner Power (On/Off) digital input
LED INDICATORS	'Hi-Res', 'Laser On', 'Good Read', 'Power On'
LASER CLASSIFICATION	IEC 825-1 Class 2; CDRH Class II
LASER CONTROL	Security system to turn laser off in case of motor slow down or failure
DIMENSIONS	50 x 40 x 28 mm (1.97 x 1.57 x 1.10 in)
WEIGHT (without cable)	150 g (5.29 oz)
CASE MATERIAL	Die-cast zinc
OPERATING TEMPERATURE	0 to 40 °C (32 to 104 °F)
STORAGE TEMPERATURE	-20 to 70 °C (-4 to 158 °F)
HUMIDITY	90% non condensing
VIBRATION RESISTANCE	IEC 68-2-6 test FC 1.5 mm; 10 to 55 Hz; 2 hours on each axis
SHOCK RESISTANCE	IEC 68-2-27 test EA 30 G; 11 ms; 3 shocks on each axis
PROTECTION CLASS	IP65


DIMENSIONS

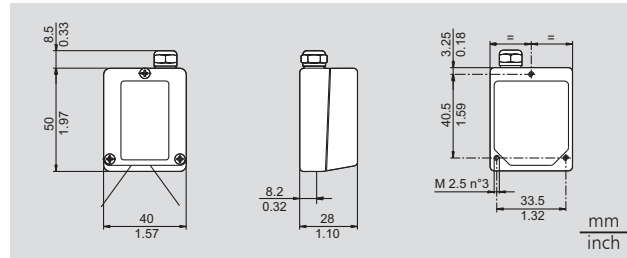


READING DIAGRAMS

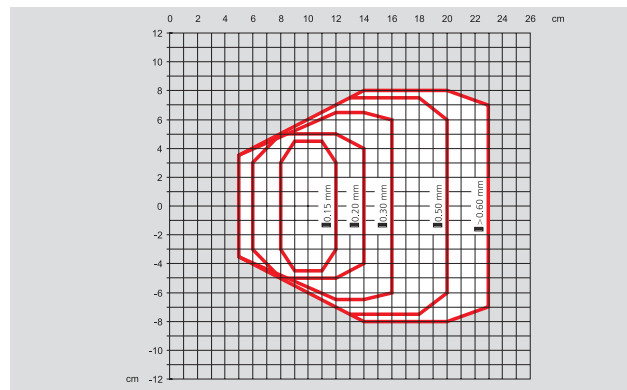

LS2200-1XXX - Standard resolution model

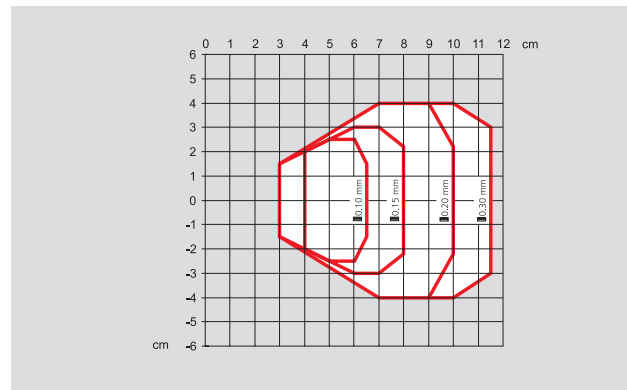

LS2200-2XXX - High resolution model



Product and company names and logos referenced may be either trademarks or registered trademarks of their respective companies.

We reserve the right to make modifications and improvements

Datalogic S.p.A. Italy
Corporate Headquarters
Tel. +39 051/3147011
Fax +39 051/3147170
venditeitalia@datalogic.it
info@datalogic.it

Sales Italy
Tel. +39 051/3147011
Fax +39 051/3147170
venditeitalia@datalogic.it

Sales International
(Central and South America,
Far East, Middle East - Africa)
Tel. +39 041/5986511
Fax +39 041/5986550
sales-intl@datalogic.it

Australia
Datalogic PTY LTD.
Tel. +61 3/95589299
Fax +61 3/95589233
sales@datalogic.com.au
info@datalogic.it

Germany
Datalogic GmbH
Tel. +49 7026/6080
Fax +49 7026/5746
info@datalogic.de

Sweden
Datalogic AB
Tel. +46 40/385000
Fax +46 40/385001
info@datalogic.se

Austria
Datalogic Handelsges. mbH
Tel. +43 2236/258820
Fax +43 2236/258825
office@datalogic.co.at

Japan
Izumi Datalogic Co., Ltd.
Tel. +81 78/3033400
Fax +81 78/3033402
idlmarke@izumi-datalogic.co.jp

United Kingdom
Datalogic UK Ltd.
Tel. +44 1582/464900
Fax +44 1582/464999
enquiries@datalogic.demon.co.uk

Denmark
Datalogic AB
Tel. +45 70/239970
Fax +45 70/239972
info@datalogic.se

Netherlands
Datalogic Optic Electronics BV
Tel. +31 346/572888
Fax +31 346/568736
info@datalogic.nl

U.S.A.
Datalogic Inc.
Tel. +1 859/6897000
Fax +1 859/3344970
info@datalogic.com

France
Datalogic France S.A.
Tel. +33 1/60921111
Fax +33 1/60921340
info@datalogic.fr

Spain
Datalogic Iberia
Tel. +34 91/3837755
Fax +34 91/3837962
dliberia@datalogic.it

Datalogic Quality Partner

