


COMPANION PLUS™

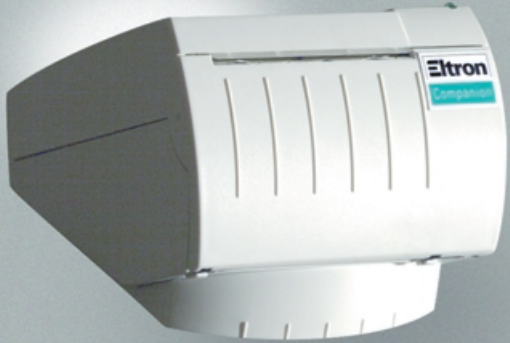

Low Cost Receipt and Label Printer for Store and Office

All at the industry's lowest price!

Print customer receipts at your sales counter or labels for shipping, mailing and inventory with the Companion Plus. Versatile, compact and durable, the Companion Plus is the perfect mate for cash registers, computers and telecommunication devices.

With its small footprint and high quality direct thermal printing, the Companion Plus also offers liner-free label printing. Print product, shipping, specimen, file folder, video and diskette labels. When desk space is limited, the Companion Plus can be wall mounted.

Designed for use in many applications, including:

- Receipt printing in restaurants and retail stores
- Transaction receipts in financial institutions
- Mailing, parcel shipping and specimen labeling

All for a price far below other direct thermal printers!

All Eltron Printers are built to tough ISO 9001 standards.

Eltron®

Companion Plus Specifications*

General Specifications

- 64 Kb SRAM standard
- Reflective sensor for black marks and notched labels
- Internal label and receipt roll holder
- Easy to load paper path
- CPL2 and CPL1, or ESC/POS command languages
- Prints text, graphics and bar codes in four directions: 0°, 90°, 180° and 270°
- Line and box drawing features, PCX graphics supported
- Line and page print modes
- Supports most popular ESCPOS™ commands

Printing

- Direct thermal printing
- Printing speed of 1" (25.4mm) per second
- 203 dpi (8 dots/mm) print resolution
- Maximum print width: 2.83" (72mm)
- Maximum print length: 4" (101.6mm) in page print mode

Bar Codes

- Code 39
- Code 128 subsets A, B and C
- Interleaved 2 of 5
- UPC-A, UPC-E, 2 & 5 digit add-on
- EAN-8, EAN-13, 2 & 5 digit add-on
- Postnet
- Maxi Code
- PDF-417
- Bar codes with or without human readable text
- Bar codes can be printed in four directions: 0°, 90°, 180° and 270°

Fonts & Graphics

- Horizontal and vertical magnification of fonts up to 4x
- Fonts can be printed in four directions: 0°, 90°, 180° and 270°
- Character sets: 5.6 cpi (16 column), 12.7 cpi (36 column), 14.5 cpi (41 column), 16.9 cpi (48 column) and 20.3 cpi (58 column)
- Supports line and box drawings

Media Handling

- Reflective sensor for back marks and notched labels

Media

- Materials: Direct thermal sensitive labels and papers
- Type: Roll-fed, die cut (notched thermal labels) and continuous roll thermal receipt paper
- Maximum media width receipt paper: 3" (76mm)
- Minimum media width receipt paper: 2.6" (66mm)
- Maximum media width labels: 3.1" (79mm)
- Minimum media width labels: 3.1" (79mm), 1.0" (25.4mm) I.D. core for labels and receipt
- Maximum media length at thickness:

<u>Length</u>	<u>Thickness</u>
1750" (44.6m)	2.2 mil (.056mm)
1170" (29.7m)	3.2 mil (.081mm)
875" (22.3m)	4.2 mil (.107mm)

Communications Interface

- RS232C & TTL (RJ11 Connector)
- Xon/Xoff handshaking
- Daisy chain port
- Cash drawer kicker

Mechanical

- Width 4" (102mm)
- Depth 5" (125mm)
- Height 6" (153mm)
- Weight 4.2 lbs (1.9kg) including power supply

Electrical

- Nominal Voltage: (Linear) 120V/220V, 60/50 Hz
- Complies with FCC Class B and CE requirements; built to CUL and TUV requirements

Environmental

- Operating Temperature: 40°F to 105°F (5°C to 40°C)
- Storage Temperature: -40°F to 140°F (-40°C to 60°C)
- Humidity: 10% to 90% non-condensing
- Ventilation: Free air

Options

- Liner free label model
- Windows™ printer driver
- ESCPOS™ model
- Companion starter kit for all applications

Eltron®



*Specifications subject to change without notice. All Copyrights, Trade and Service Marks shown or depicted herein are registered by their owners. No infringement is made for or implied by the use thereof. ©1999 Zebra Technologies Corporation. All Rights Reserved.

Corporate Headquarters

333 Corporate Woods Parkway
Vernon Hills, IL 60061-3109 U.S.A
Telephone: +1 847 634 6700
Toll free in US: +1 877 462 9028
Fax: +1 847 913 8766

Other Locations

United States: California, Florida, Utah, Wisconsin
Europe: France, Germany, United Kingdom
Asia: Japan, Singapore

www.eltron.com