

product specifications

physical characteristics

Length 39.4cm (15.5")
Width 40.6cm (16.0")

Height 15.9cm (6.25")
Weight 7.48kg (16.5 lb.)

electrical

100-120 VAC, 200-240 VAC, 47-63 Hz, 250 Watt maximum

North American or International power switch selectable

environment

Operating
10° to 50°C
(50° to 122°F)

Storage
-20° to +60°C
(-4° to 140°F)

Humidity
Non-condensing
(0% to 85%)

interfaces

1ST HOST UPLINE

Ethernet

10 Base 2 (BNC), 10 Base 5 (AUI), 100 Base Tx (RJ-45), 10 Base T (RJ-45)

Token Ring

Standard IBM

Twinaxial

Standard IBM, Coaxial, BNC

SDLC

SYNC RS-232D (1.2 Kbps to 9.6 Kbps) (One IBM card per M200)

1ST DOWNLINE & 2ND DOWNLINE

Ethernet

Same connections as above (can serve as 2nd Host Upline; limited to one IBM and two Ethernet or two Ethernet cards in M200)

2-port 900 MHz RF

Standard 9181 DB-9 cable connectors (two 9181 BRUs)

4-port 900 MHz RF

Includes 6' cable with 4 DB-9 connectors (four 9181 BRUs);

Note: Two 2-port or 4-port cards per Model 200

COM Ports 1-2

UPS cable, 36.6 Kbps modem, or 9154/9161 Controllers

COM 3 field upgrade

Adds one serial port
User

VGA Color Monitor
(customer provided)

Keyboard & mouse

101 type keyboard and mouse are included with system

supported devices

900 MHz RF devices

Intermec Printers

2.4 GHz RF devices

CrossBar™ readers

Vehicle Mount Units

Up to 128 devices

central network management

Network

Manage data collection network from controller; configure Antares over radio frequency

electronic software distribution

Download TRAKKER® Antares™ firmware changes over RF

Distribute binary (.exe) programs and data files to JANUS® and TRAKKER Antares RF portable terminals

Maintain terminals over RF without visiting each location

Quick Restoration

Designed for fast network changes & restoration

accessories

**North American
International & UPS
versions**

Uninterruptible power supply with restoration software; Restarts automatically when AC is restored

36.6 Kbps modem

North American version

System expansion

License to add more terminals above standard 1-8 or screen mapping

Power cords

International AC power cords

Miscellaneous cables

UPS connector cable and modem RS-232 cable

graphic user interface

Fast setup

Simple to operate and support with minimal training

Screen Designer

Create terminal screens without programming; Download screens over RF to JANUS™ and TRAKKER® Antares™ units; Part of Screen Mapping

Host Script Builder

Create Script program that maps 5250/3270 ANSI/DEC VT100, VT220, VT320 data fields onto smaller screens of TRAKKER® Antares™ & JANUS RF, or 95 XX Terminals

host protocols

Telnet, TN5250, TN3270

IBM SNA

communication applications

Terminal Emulation

ANSI/VT100, VT220, VT320, and IBM 5250/3270, JANUS(900 MHz RF), JANUS™ & TRAKKER® Antares™ (2.4 GHz RF)

Screen Mapping

IBM 5250/3270, ANSI/DEC VT100, VT220, VT320, JANUS RF (2.4 GHz RF & 900MHz RF) & TRAKKER® Antares™ 2.4 GHz RF

Client/Server

Peer-to-peer for TCP/IP and APPC/LU6.2, Direct TCP Socket Comm, JANUS RF (900 MHz RF) & TRAKKER® Antares™ (2.4 GHz RF)


message routing

Simultaneous routing

Sends and Receives messages from multiple hosts and applications

Store/Forward

Insures delivery to terminals and applications; Continues data collection during network failures

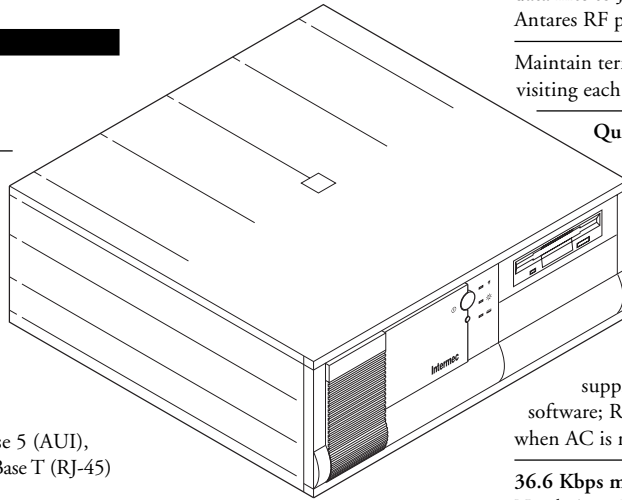

**print!
capture!
connect!**

O200

universal network controller

north america

INTERMEC CORPORATION
6001 36TH AVENUE WEST
P.O. BOX 4280
EVERETT, WASHINGTON 98203-9280
1 800 347 2636 tel
1 425 355 9551 fax
HTTP://www.intermec.com internet
info@intermec.com e-mail
GOVERNMENT SYSTEMS GROUP:
1 425 356 1652 tel
1 425 356 1889 fax
LABEL PRODUCTS: 1 800 227 9947 tel

europa/middle east/africa

INTERMEC EUROPEAN HEADQUARTERS
P.O. BOX 40223
6504 AE NIJMEGEN
MICROWEG 20
6545 CM NIJMEGEN
THE NETHERLANDS
+31 24 3723 131 tel
+31 24 3781 847 fax
LABEL PRODUCTS:
+31 24 3723 100 tel
+31 24 3780 070 fax

asia-pacific/latin america

INTERMEC CORPORATION
6001 36TH AVENUE WEST
P.O. BOX 4280
EVERETT, WASHINGTON 98203-9280
1 425 348 2755 tel
1 425 348 3788 fax
LABEL PRODUCTS: 1 513 874 5882

world-wide fax

DOCUMENT RETRIEVAL SERVICE
1 800 755 5505 tel

The words Intermec, AccessPoint™, Collect™, CrossBar®, Interscan™, IPL™, IRL®, JANUS®, MEDALLION®, PrintSet™, TRAKKER®, TRAKKER® Antares™, and the Print!Capture!Connect! character icons are trademarks of Intermec Corporation. Specifications are subject to change without notice. © 7/97 Intermec Corporation
A Western Atlas Company

Intermec