

product specifications

physical characteristics

controller

Length

19.1 cm (7.5")

Width

16.5 cm (6.5")

Height

3.0 cm (1.2")

Weight

504 kg (1 lbs. 2 oz)

power supply

Length

14.7 cm (5.8")

Width

7.6 cm (3.0")


Height

7.1 cm (2.8")

Weight

980 kg (2 lbs. 3 oz)

Power Supply has a 6-foot line cord and a 5-foot DC output cord with a 7-pin plug.

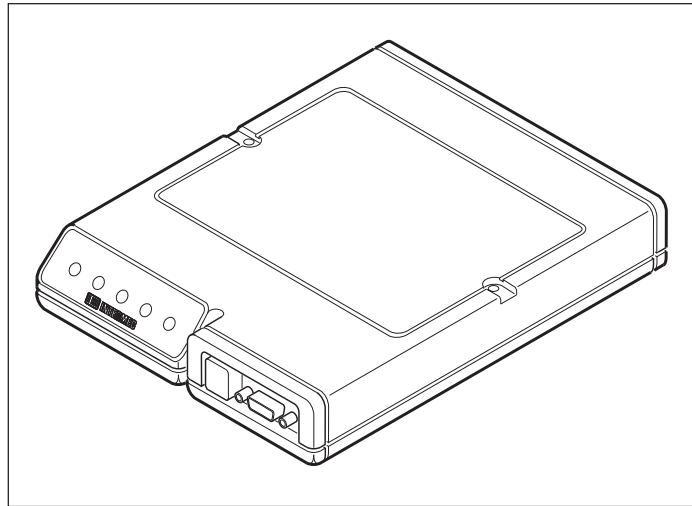

electrical

USA Power Supply

120 VAC (+10% to -15%)
60 Hz 20 Watts

Optional Power Supplies Available for

120 VAC, 50 Hz, 100 VAC,
50/60 Hz, 220 VAC, 50/60 Hz,
240 VAC, 50/60 Hz

environmental

Operating

0° to 50°C (32° to 122°F)

Storage

-10° to 60°C (14° to 140°F)

Humidity

Relative non-condensing (10 to 90%)

interfaces

Host Communication

EIA RS-232-C, RS-422

ASCII character format

Even, odd, disable,
mark or space parity

One or two stop bits

Xon/Xoff

Optional LRC check

110 to 19.2K baud

User-definable poll-select sequence Polled Device Communication

1 port, 32 devices supported

4-wire RS 485

2400 to 19.2K baud

Intermec multi-drop protocol

Supports 7 or 8 data bits ASCII
character format

product configurations

9154A010101: 120V, 60 Hz

9154A010102: 100V, 50/60 Hz

9154A010103: 220V, 50/60 Hz

9154A010104: 240V, 50/60 Hz



**print!
capture!
connect!**

9154

**CROSSBAR®
controller**

north america

INTERMEC CORPORATION
6001 36TH AVENUE WEST
P.O. BOX 4280
EVERETT, WASHINGTON 98203-9280
1 800 347 2636 tel
1 206 355 9551 fax
HTTP://www.intermec.com internet
info@intermec.com e-mail
GOVERNMENT SYSTEMS GROUP:
1 206 356 1652 tel
1 206 356 1889 fax
LABEL PRODUCTS: 1 800 227 9947 tel

europa/middle east/africa

INTERMEC EUROPEAN HEADQUARTERS
P.O. BOX 40223
6504 AE NIJMEGEN
MICROWEG 20
6545 CM NIJMEGEN
THE NETHERLANDS
+31 24 3723 131 tel
+31 24 3781 847 fax
LABEL PRODUCTS:
+31 24 3723 100 tel
+31 24 3780 070 fax

asia-pacific/latin america

INTERMEC CORPORATION
6001 36TH AVENUE WEST
P.O. BOX 4280
EVERETT, WASHINGTON 98203-9280
1 206 348 2755 tel
1 206 348 3788 fax
LABEL PRODUCTS: 1 513 874 5882

world-wide fax

DOCUMENT RETRIEVAL SERVICE
1 800 755 5505 tel

The words Intermec, AccessPoint™, Collect™, CrossBar®, Interscan™, IPL™, IRL®, JANUS®, MEDALLION®, PrintSet™, TRAKKER®, TRAKKER® Antares™, and the Print!Capture!Connect! character icons are trademarks of Intermec Corporation. Specifications are subject to change without notice. © 3/97 Intermec Corporation A Western Atlas Company

Intermec