

product specifications

physical characteristics

Length
26.7 cm (10.3")

Height
6.3 cm (2.5")

Width
18.9 cm (7.5")

Weight
10.05 kg (4.6 lbs.)

host interface

EIA RS-232 or RS-422

Data rate
300 bps to 19.2 KBps

DB25 connector

ASCII asynchronous protocol

Odd, even, mark, space parity

7 or 8 data bits

One or two stop bits

Xon/Xoff handshake

Optional LRC for enhanced data integrity checking

Addressing and protocol compatible with 9154

supervisory port


CRT interface

RS-232

Data rate
300 bps to 19.2 KBps

DB25 connector

Automatic baud rate detection

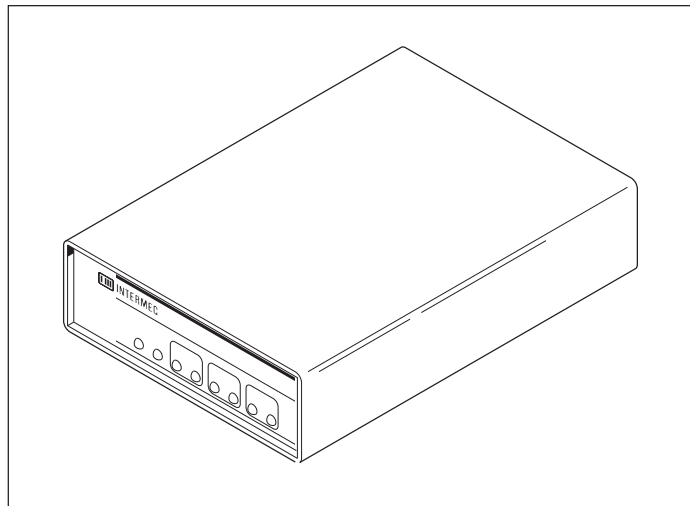

downline communications

Two ports

DB9 connectors

RS-422

Data-rate
64 KBps

NRZI

Protocol
ISO Standard HDLC

Devices supported
64

status indicator lights

Power on

Fault

Transmit to Downline 1 & 2

Receive from Downline 1 & 2

Transmit to Host

Receive from Host

system memory

Up to 512K,
with power-fail battery backup

real-time clock

Configurable through supervisory terminal or from host

electrical

AC power available for
120 VAC 50/60 Hz, 100 VAC 50/60 Hz, 230 VAC 50/60 Hz

environmental

Operating
0° to 50°C (32° to 122°F)

Storage
-40° to 70°C (-40° to 158°F)

Humidity
Non-condensing (10 to 90% RH)

regulatory approvals

UL Listed, UL 1950

CSA Certified, C22.2 No. 950-M89

FCC part 15

DOC SOR/88-475

north america

INTERMEC CORPORATION
6001 36TH AVENUE WEST
P.O. BOX 4280
EVERETT, WASHINGTON 98203-9280
1 800 347 2636 *tel*
1 206 355 9551 *fax*
HTTP://www.intermec.com *internet*
info@intermec.com *e-mail*
GOVERNMENT SYSTEMS GROUP:
1 206 356 1652 *tel*
1 206 356 1889 *fax*
LABEL PRODUCTS: 1 800 227 9947 *tel*

europa/middle east/africa

INTERMEC EUROPEAN HEADQUARTERS
P.O. BOX 40223
6504 AE NIJMEGEN
MICROWEG 20
6545 CM NIJMEGEN
THE NETHERLANDS
+31 24 3723 131 *tel*
+31 24 3781 847 *fax*
LABEL PRODUCTS:
+31 24 3723 100 *tel*
+31 24 3780 070 *fax*

asia-pacific/latin america

INTERMEC CORPORATION
6001 36TH AVENUE WEST
P.O. BOX 4280
EVERETT, WASHINGTON 98203-9280
1 206 348 2755 *tel*
1 206 348 3788 *fax*
LABEL PRODUCTS: 1 513 874 5882

world-wide fax

DOCUMENT RETRIEVAL SERVICE
1 800 755 5505 *tel*

The words Intermec, AccessPoint™, Collect™, CrossBar®, Interscan™, IPL™, IRL®, JANUS®, MEDALLION®, PrintSet™, TRAKKER®, TRAKKER® Antares™, and the Print!Capture!Connect! character icons are trademarks of Intermec Corporation. Specifications are subject to change without notice. © 3/97 Intermec Corporation
A Western Atlas Company

Intermec



print!
capture!
connect!