

product specifications

physical characteristics

Length

19.3 cm (7.6")

Height

4.1 cm (1.6")

Width

8.3 cm (3.24")

Weight

502 g (17.7 oz.),
with NiCad battery pack

hardware

8-bit, CMOS microprocessor

Real-time clock/calendar

software

IRL® v2.2 program editor
and compiler

memory size

64 KB to 512 KB CMOS RAM

Optional 32 KB or 64 KB
EPROM cartridge

codes read

Code 39

HIBC

UPC/EAN

Codabar

Interleaved 2 of 5

2 of 5

Code 11

Code 93

Code 128

Code 16k

operating data

RS-232-C (TX, RX, RTS, CTS, DTR)

Half or full duplex

ASCII 7- or 8-bit Selectable parity

300 to 19,200 bps

protocols

Point-to-point

Polling Mode D

User-defined multi-drop

Xmodem

Userdefined Xmodem

CrossBar®/RF

interfaces

10-pin long-life

RS-232-C connector
(10,000 insertions)

6-pin modular input device connector

Audio jack for headset

Power supply jack

display

4 lines, 20 characters per line,
backlit LCD

5 x 7 dot matrix characters plus cursor

24-line display buffer

keypad

48 alphanumeric and function keys

Complete ASCII 128-character set

8 programmable function keys

power options

Primary Power


NiCad battery pack, 1,000 MAHR, 20
hours operation with wand or 12,000
1-second scans with diode laser; AC
power supply

Backup Power

190 mahr lithium battery backs RAM
and clock while primary power is
removed or low, typical 5-year shelf life

Charging

6 hours to charge pack with 40Z
Battery Charger; 14 hours to charge
pack within the TRAKKER®

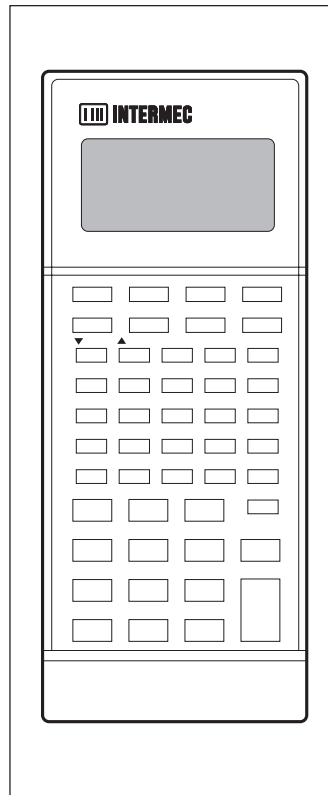

input devices

Intermec 128X Digital Wands

Intermec 15xx Laser Scanners

Intermec 1354/55 Badge Scanners

Intermec 1463 CCD Scanner

environment

Operating

-20° to 50° C (-4° to 122° F)

Storage

-40° to 60° C (-40° to 140° F)

Humidity

Non-condensing (0 to 90%)



**print!
capture!
connect!**

9440

**TRAKKER®
portable
transaction
manager**

north america

INTERMEC CORPORATION
6001 36TH AVENUE WEST
P.O. BOX 4280
EVERETT, WASHINGTON 98203-9280
1 800 347 2636 *tel*
1 206 355 9551 *fax*
[HTTP://www.intermec.com](http://www.intermec.com) *internet*
info@intermec.com *e-mail*
GOVERNMENT SYSTEMS GROUP:
1 206 356 1652 *tel*
1 206 356 1889 *fax*
LABEL PRODUCTS: 1 800 227 9947 *tel*

europa/middle east/africa

INTERMEC EUROPEAN HEADQUARTERS
P.O. BOX 40223
6504 AE NIJMEGEN
MICROWEG 20
6545 CM NIJMEGEN
THE NETHERLANDS
+31 24 3723 131 *tel*
+31 24 3781 847 *fax*
LABEL PRODUCTS:
+31 24 3723 100 *tel*
+31 24 3780 070 *fax*

asia-pacific/latin america

INTERMEC CORPORATION
6001 36TH AVENUE WEST
P.O. BOX 4280
EVERETT, WASHINGTON 98203-9280
1 206 348 2755 *tel*
1 206 348 3788 *fax*
LABEL PRODUCTS: 1 513 874 5882

world-wide fax

DOCUMENT RETRIEVAL SERVICE
1 800 755 5505 *tel*

The words Intermec, AccessPoint™, Collect™, CrossBar®, Interscan™, IPL™, IRL®, JANUS®, MEDALLION®, PrintSet™, TRAKKER®, TRAKKER® Antares™, and the Print!Capture!Connect! character icons are trademarks of Intermec Corporation. Specifications are subject to change without notice. © 3/97 Intermec Corporation A Western Atlas Company

Intermec