

product specifications

physical characteristics

Length
19.1 cm (7.5")

Height
3.1 cm (1.2")

Width
16.5 cm (6.5")

Weight
504 g (18 oz.)

electrical

Uses external power pack supplying DC current to reader

Available for 100, 120, 220, and 240V AC sources

AC powerpacks

WAND (20 Watts)

Length
14.7 cm (5.8")

Height
7.1 cm (2.8")

Width
7.6 cm (3.0")

Weight
1 kg (35 oz)

LASER (45 Watts)

Length
11.7 cm (4.6")

Height
5.3 cm (2.1")

Width
7.4 cm (2.9")

Weight
1.5 kg (53 oz)


Powerpack has 6' line cord and a 5' DC output cord with a 7-pin plug

environmental

Operating
0° to 50°C (32° to 122°F)

Storage
-10° to 60°C (14° to 140°F)

Humidity
Non-condensing (10 to 90% RH)

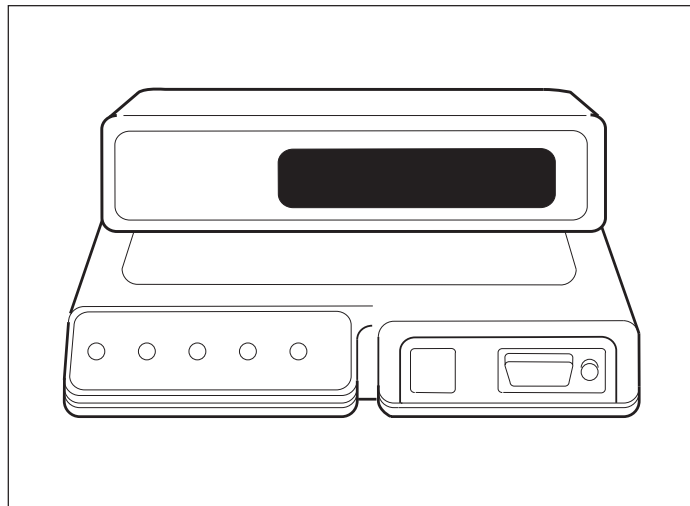

programmability

Interactive Reader Language (IRL®) development system and program execution capability

memory

64K battery-backed CMOS RAM

operator I/O

32-character display

Audible feedback

Optional full alphanumeric keyboard (1700)

Optional satellite input stations (9191)

codes read

Code 39, HIBC, Interleaved 2 of 5 (fixed and variable length), Codabar® (standard and ABC), UPC/EAN, Code 11, Code 128, UCC/EAN 12, Code 49, Code 93

Autodiscrimination allows any valid combination of codes

interfaces

RS-232, RS-422, RS-485

ASCII 7 or 8 bit, full 128 character set

Rates

Up to 19,200 baud

Parity

Odd, even, disable, mark, space

Dual I/O ports

Modem, 25-socket D-Subminiature (female) wired as DTE; Terminal, 25-pin D-Subminiature (male) wired as DCE; Full or half duplex

communications protocol

Point-to-point

Polling mode D

User-defined

Multi-drop

User-defined multi-drop

character sets

USA ASCII, French, UK, Danish, Swedish, Italian, Spanish, Katakana

regulatory agency approvals

UL 478 5th Ed.; CSA C22.2 #154-M1983; FCC Part 15, Sub Class A



**print!
capture!
connect!**

9512

bar code transaction manager

north america

INTERMEC CORPORATION
6001 36TH AVENUE WEST
P.O. BOX 4280
EVERETT, WASHINGTON 98203-9280
1 800 347 2636 tel
1 206 355 9551 fax
HTTP://www.intermec.com internet
info@intermec.com e-mail
GOVERNMENT SYSTEMS GROUP:
1 206 356 1652 tel
1 206 356 1889 fax
LABEL PRODUCTS: 1 800 227 9947 tel

europa/middle east/africa

INTERMEC EUROPEAN HEADQUARTERS
P.O. BOX 40223
6504 AE NIJMEGEN
MICROWEG 20
6545 CM NIJMEGEN
THE NETHERLANDS
+31 24 3723 131 tel
+31 24 3781 847 fax
LABEL PRODUCTS:
+31 24 3723 100 tel
+31 24 3780 070 fax

asia-pacific/latin america

INTERMEC CORPORATION
6001 36TH AVENUE WEST
P.O. BOX 4280
EVERETT, WASHINGTON 98203-9280
1 206 348 2755 tel
1 206 348 3788 fax
LABEL PRODUCTS: 1 513 874 5882

world-wide fax

DOCUMENT RETRIEVAL SERVICE
1 800 755 5505 tel

The words Intermec, AccessPoint™, Collect™, CrossBar®, Interscan™, IPL™, IRL®, JANUS®, MEDALLION®, PrintSet™, TRAKKER®, TRAKKER® Antares™, and the Print!Capture!Connect! character icons are trademarks of Intermec Corporation. Specifications are subject to change without notice. © 3/97 Intermec Corporation A Western Atlas Company

Intermec