

# product specifications

## physical characteristics

**Length**  
36.6 cm (14.4")

**Width**  
22.9 cm (9.0")

**Depth**  
8.4 cm (3.3")

**Weight**  
4.75 kg (10.56 lbs.)

## electrical

Relays (3): 24 VAC/DC, 1amp max

Sense inputs (3): 5V or 24V

**Power supply**  
Standard IEC connector, 100 VAC to 240 VAC, 50/60 Hz

## environment

**Operating**  
0° to 50°C (32° to 122°F)

**Storage**  
-10° to 60°C (14° to 140°F)

**Humidity**  
Non-condensing (10–90% RH)

## operating characteristics

Code 39, HIBC, Codabar, UPC, EAN, Code 11, Code 93, 2 of 5, Interleaved 2 of 5 (fixed (even only) and variable length)

## interfaces

ASCII 7 or 8 bit, full 128 character set

**Baud rates**  
Up to 19,200 bps

Parity selectable

Full or half duplex


**Relays**  
SPDT contacts

**Sense inputs**  
AC coupled, optically isolated

RS-232-C, RS-422 or 4-wire RS-485 multi-drop

**Dual I/O ports**  
Modem: 25–socket D–Subminiature (female) wired as DTE ; Terminal\*: 25–pin D–Subminiature (male) wired as DCE

\*Not accessible when magnetic stripe reader option selected

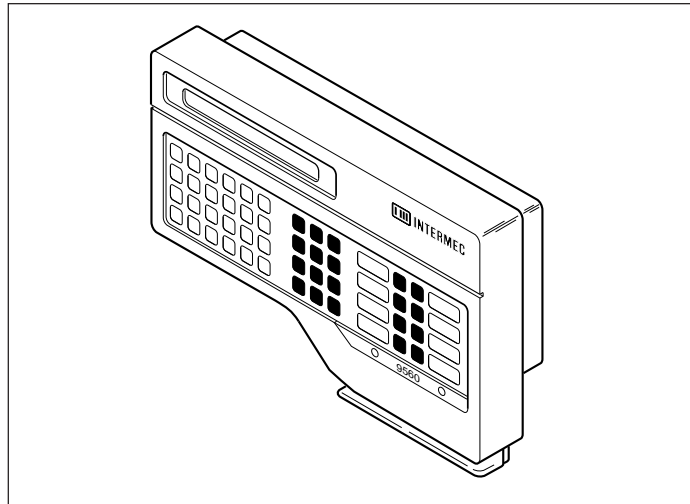

## memory

256K battery backed-up CMOS RAM

## programmability

Interactive Reader Language v 2.1

## operator I/O

**Display**  
2 lines, 80–character or one line 20-character liquid crystal display with backlight

Audible feedback

## character sets

USA (ASCII), French, UK, Danish, Swedish, Italian, Spanish, Katakana (Magstripe reader not supported when Katakana character mode selected.)

## safety agencies

UL listed (UL 1950); CSA Certified (C22.2 #220M86); TÜV GS Licensed, EN 60950 (IEC 950); Sealed per IEC 529, Category IP53; FCC Part 15; DOC SOR/88–475; FTZ Vfg 243; EN 55022 (CISPR 22)

## product configurations

**Keypads**  
Numeric, Alphanumeric, Large Numeric

**Powercord**  
U.S., European

**Badge scanner options**  
Visible bar code, Infrared bar code, Mag stripe (Track 2), no scanner



**print!  
capture!  
connect!**

# 9560

## transaction manager

### north america

INTERMEC CORPORATION  
6001 36TH AVENUE WEST  
P.O. BOX 4280  
EVERETT, WASHINGTON 98203-9280  
1 800 347 2636 *tel*  
1 206 355 9551 *fax*  
[HTTP://www.intermec.com](http://www.intermec.com) *internet*  
[info@intermec.com](mailto:info@intermec.com) *e-mail*  
GOVERNMENT SYSTEMS GROUP:  
1 206 356 1652 *tel*  
1 206 356 1889 *fax*  
LABEL PRODUCTS: 1 800 227 9947 *tel*

### europa/middle east/africa

INTERMEC EUROPEAN HEADQUARTERS  
P.O. BOX 40223  
6504 AE NIJMEGEN  
MICROWEG 20  
6545 CM NIJMEGEN  
THE NETHERLANDS  
+31 24 3723 131 *tel*  
+31 24 3781 847 *fax*  
LABEL PRODUCTS:  
+31 24 3723 100 *tel*  
+31 24 3780 070 *fax*

### asia-pacific/latin america

INTERMEC CORPORATION  
6001 36TH AVENUE WEST  
P.O. BOX 4280  
EVERETT, WASHINGTON 98203-9280  
1 206 348 2755 *tel*  
1 206 348 3788 *fax*  
LABEL PRODUCTS: 1 513 874 5882

### world-wide fax

DOCUMENT RETRIEVAL SERVICE  
1 800 755 5505 *tel*

The words Intermec, AccessPoint™, Collect™, CrossBar®, Interscan™, IPL™, IRL®, JANUS®, MEDALLION®, PrintSet™, TRAKKER®, TRAKKER® Antares™, and the Print!Capture!Connect! character icons are trademarks of Intermec Corporation. Specifications are subject to change without notice. © 3/97 Intermec Corporation A Western Atlas Company

# Intermec