



Intermec

Product Profile

- Integrated Bluetooth™ capability
- Signature capture printing enabled
- Lightweight, rugged, compact design
- Resilient high-density polyethylene case
- 4 MB of updateable flash
- Companion to the Intermec® 700 Series Mobile Computer equipped with Bluetooth™
- 4" (10.2 cm) paper width capability
- 40-column format, with optional compressed 80-column capability



P B 4 0 D I R E C T T H E R M A L P O R T A B L E P R I N T E R

Convenience of Bluetooth

When paired with an Intermec® 700 Series mobile computer, the Intermec® PB40 direct thermal portable printer with *Bluetooth, offers the convenience of a personal area network (PAN) for receipt printing to frontline workers. This combination is a no hassle, wireless printing solution for various route accounting, logistics, home delivery and pre-sales applications.

Mobile workers will no longer need to go back to the truck to print a ticket or wait for a ticket to print while selecting products to deliver with the Bluetooth equipped PB40. They can begin printing from 10 meters (30 feet) away.

The PB40 can be worn at the waist, carried or left behind in the truck for maximum efficiency. With a wireless connection to the handheld computer, the user can even wear a coat in harsh weather environments and still print a ticket.

Enhanced Firmware

Faster firmware enables the PB40 to print graphics and in particular, offers signature capture capability. With its exceptional print clarity (more than 200 dpi resolution) the PB40 is ideal for

producing receipts, invoices, and proofs of delivery. Its graphics capabilities include downloadable fonts, IrDA, serial RS-232, and 4 MB flash memory for added performance.


Long-Lasting Design and Power Supply

Made from resilient high-density polyethylene, the PB40 can withstand even the most challenging applications. A reliable print mechanism and extended print duration time allow the PB40 to handle the printing requirements of a full-8 hour shift, even under tough conditions.

Lithium-ion batteries offer maximum power capacity for the PB40. Automatic power saving sleep mode and quick 3-hour recharging time, along with an optional vehicle charger, create the optimum application solution for a long service day.

40- and 80-Column Format Options

The PB40 allows users with a 4-inch paper width requirement to accommodate 40-column formats. In addition, the unit offers the ability to provide a compressed 80-column receipt, without the mobile worker having to carry the bulk of a larger 80-column printer.

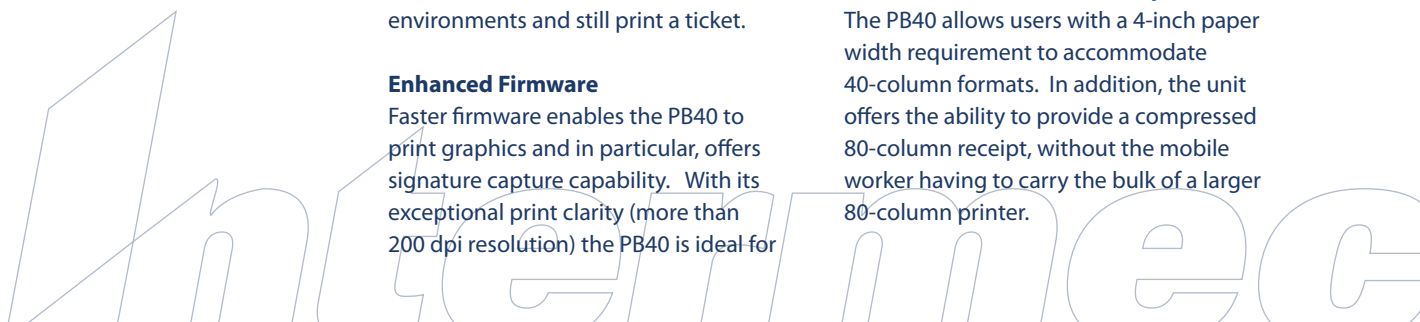

Physical Characteristics**Length:** 16.5 cm (6.5")**Width:** 16.9 cm (6.7")**Depth:** 6.7 cm (2.6")**Weight:** With 2 batteries and paper: 932 grams (32.9 oz)**Environment****Operating Temperature:** -4° to 122°F (-20° to 50°C)**Drop Spec:** Withstands multiple 152.5 cm (5") drops to concrete**Power Source**

Internal batteries, Lilon 1.8 amp/hr, 7.2v, 1350 mAH

User replaceable

Battery Recharging

Nine hours to full charge using a vehicle cigarette lighter power adapter or standard AC power adapter

Printer Mechanism Characteristics

Direct thermal line printer

203 dots per inch (dpi)

Print Speed: 5.1 cm (2") per second**Fonts**

Three resident fonts

Nine additional fonts may be downloaded

Other fonts may be purchased

Print Capabilities

Characters, graphics and bar codes

Print Medium

Thermal paper, one ply

Paper width: 11.2 cm (4.4")

Print Duration per Charge

Over 9144 cm (3,600")

Wireless LAN Characteristics**Range:** 10m (30')**Interface**

Bluetooth™

IrDA*

RS-232 serial

Chargers

AC wall charger

12V vehicle charger

Regulatory Approvals

FCC Title 47, Part 15, Subpart B, Class B

EN 55022 Class B

EN 50082-1

EN 60950

IEC 1000-3-2

IEC10000-3-3

Warranty

One year warranty. Additional service packages available.

Restrictions on Use

Some approvals and features may vary by country and may change without notice. Specs may vary based upon the specific configuration or features elected. Please check with your local Intermec sales office for further information.

*Bluetooth is a trademark owned by Bluetooth SIG, Inc., U.S.A.

North AmericaCorporate Headquarters
6001 36th Avenue West
Everett, Washington 98203
tel: 425.348.2600
fax: 425.355.9551**Systems & Solutions**550 2nd Street S.E.
Cedar Rapids, Iowa 52401
tel: 319.369.3100
fax: 319.369.3453**Media Supplies**9290 Le Saint Drive
Fairfield, Ohio 45014
tel: 513.874.5882
fax: 513.874.8487**Canada**7065 Tranmere Drive
Mississauga, Ontario
L5S 1M2 Canada
tel: 905.673.9333
fax: 905.673.3974**Europe/
Middle East & Africa**Headquarters
Sovereign House
Vastern Road
Reading RG1 8BT
United Kingdom
tel: 44.118.987.9400
fax: 44.118.987.9401**Asia****Asia Regional Office**
25-16 International Plaza
10 Anson Road
Singapore 079903
tel: 65.6324.8391
fax: 65.6324.8393**Australia**Level 7, 200 Pacific Highway
Crows Nest, NSW 2065
Australia
tel: 61.2.9492.4400
fax: 61.2.9954.6300**South America & Mexico**Latin America Headquarters
17921 B Skypark Circle
Irvine, California 92614
tel: 949.442.9393
fax: 949.757.1687Intermec South America Ltda.
Rua Arandu 1544-15 andar
Edificio Itavera
Brooklin Novo 04562-031
Sao Paulo, SP
Brazil
tel: 55.11.5501.2070**Mexico**Tumulipas 141, Primero Piso
06140 Mexico, D.F.
tel: 525.55.211.1919
fax: 525.55.211.8121**Worldwide
Fax Document****Retrieval Service**
800.755.5505
(North America Only)
tel: 650.556.8447**Internet**

www.intermec.com

Sales800.347.2636
(toll free in N.A.)
tel: 425.348.2726**Service and Support**800.755.5505
(toll free in N.A.)
tel: 425.356.1799

Copyright © 2003 Intermec Technologies Corporation. All rights reserved. Intermec is a registered trademark of Intermec Technologies Corporation. All other trademarks are the property of their respective owners. Printed in the U.S.A. 611429-01B 08/04

In a continuing effort to improve our products, Intermec Technologies Corporation reserves the right to change specifications and features without prior notice.