

The Microscan Universal Stand™ provides hands-free support for Microscan readers and is available in 4-inch, 6-inch, and 10-inch heights. A swivel ball-joint design allows for 360 degrees horizontal rotation and 180 degrees vertical rotation of the reader, assuring fast and accurate positioning. Readers are mounted to the stands with custom-fit adapter plates.

The base plate, useful for desktop applications, is standardized to fit all three Universal Stand™ types. If necessary, the stands can be further extended with the 3-inch extension joint or the 6-inch extension bar kits.

UNIVERSAL STAND™ SPECIFICATIONS

Universal Stand™

4-inch, knob adjustable handle	98-200008-01
6-inch, knob adjustable head and foot	98-200007-01
10-inch flex neck, adjustable head	98-200006-01

Adapter Plate Kits


VS-310	98-200010-01
MS-520, MS-525, MS-610, MS-615	98-200011-01
MS-710, MS-810, MS-850	98-200012-01
MS-7100, MS-7180, MS-7115, MS-7185	98-200013-01
Quadrus™ flat plate	98-200018-01
Quadrus™ 90° plate	98-200020-01

Accessories


Base plate	98-200017-01
3-inch extension joint kit	12-300015-01
6-inch extension bar kit* (w/adjustment knob)	98-200024-01

* Do not use more than one extension kit when mounting the MS-7100 or MS-7180 unless the overhang angle is less than 20° off vertical. All screws included.


Universal Stand Base




4-inch Universal Stand

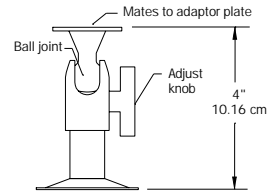


6-inch Universal Stand

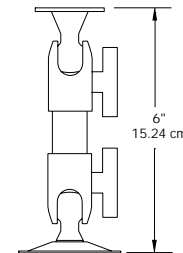



10-inch Flex Neck Universal Stand

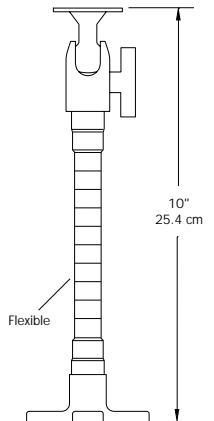


3-inch Extension Joint Kit




6-inch Extension Bar Kit

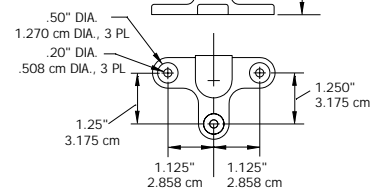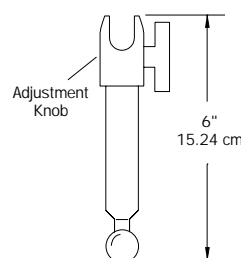

Base Plate
(Reduced scale)

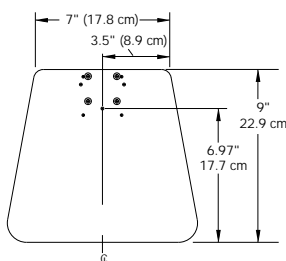

Base Plate Hole Pattern

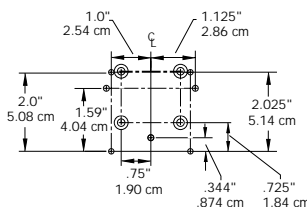

MICROSCAN®

REALIZING YOUR VISION™

Microscan Systems, Inc.

Tel 425 226 5700 / 800 251 7711

Fax 425 226 8250

Microscan Europe

Tel 31 172 470284 / Fax 31 172 477347

Microscan U.K.

Tel 44 1223 722800 / Fax 44 1223 506099

Web site: www.microscan.com

E-mail: info@microscan.com

©1998 Microscan Systems, Inc.

Specifications subject to change. 11/98

ISO 9001/Cert. No. US96/0465