

CLV 440/442

Bar Code Scanner

Dynamic focus control

Advanced line



Compact but powerful

The new bar code scanners CLV 440/442 represent the newest members of our high performance scanner family using dynamic focus control, extremely large reading distance and great depth of field. This all comes in a very compact and robust housing with IP 65 protection. These scanners were designed by incorporating innovative features into a miniaturized package size. SMART Code recognition technology leads to a definite increase of first good read rate. The Reflector Polling feature eliminates the necessity of additional photoelectric triggering switches. The dynamic focus control feature opens up a myriad of new applications with alternating reading distances. Additional variants, such as angled and oscillating mirror versions, provide solutions for special requirements, such as reading bar codes on large areas.

Benefits:

- Enhanced read rate even on damaged or dirty bar codes
- Cost savings for identification of bar codes at various angles thanks to attractive system design
- No additional photoelectric switch necessary for triggering
- Extremely easy handling
- Quick installation
- Highest availability
- High reliability


CLV 440/442 at a glance:

- Reliable code recognition in realtime using SMART technology
- Dynamic focus control in realtime
- Insensitive to ambient light and glare
- AutoSetup ensures automatic optimizing of reading performance
- Flash memory for firmware
- Reflector Polling generates an integrated trigger
- Profile Programming makes configuration easy
- Beeper confirms reading process
- Integrated power supply tolerates wide range of input voltage
- Compact housing for tight fits
- Oscillating mirror option


Reading diagrams

Line scanner


CLV 440-0010

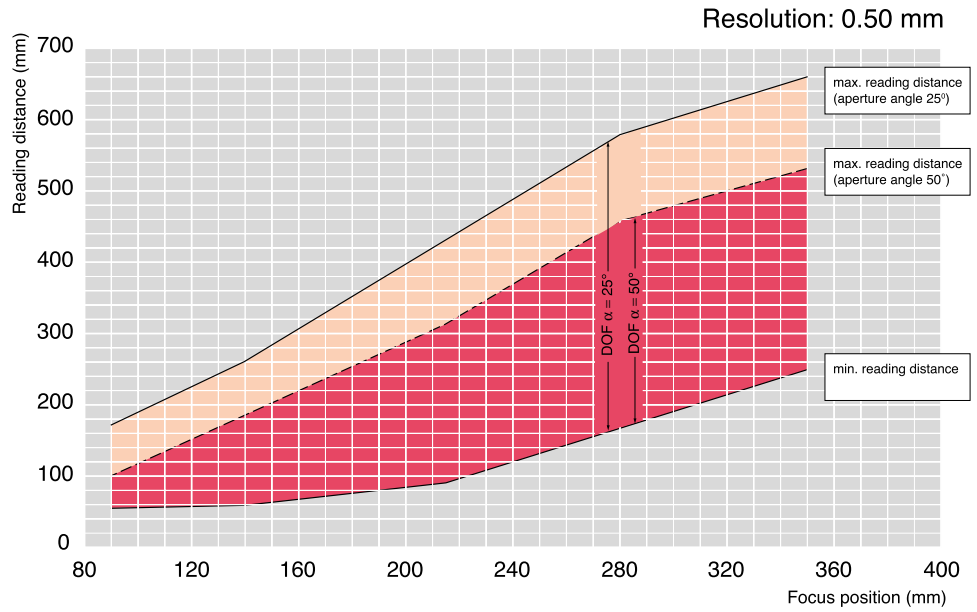

CLV 440-0010

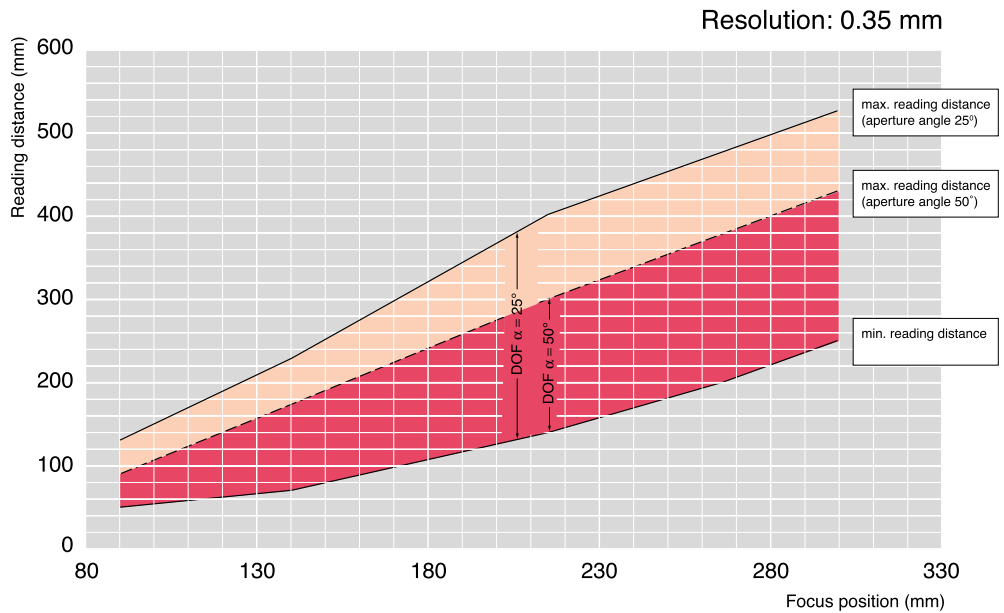

CLV 442-0010

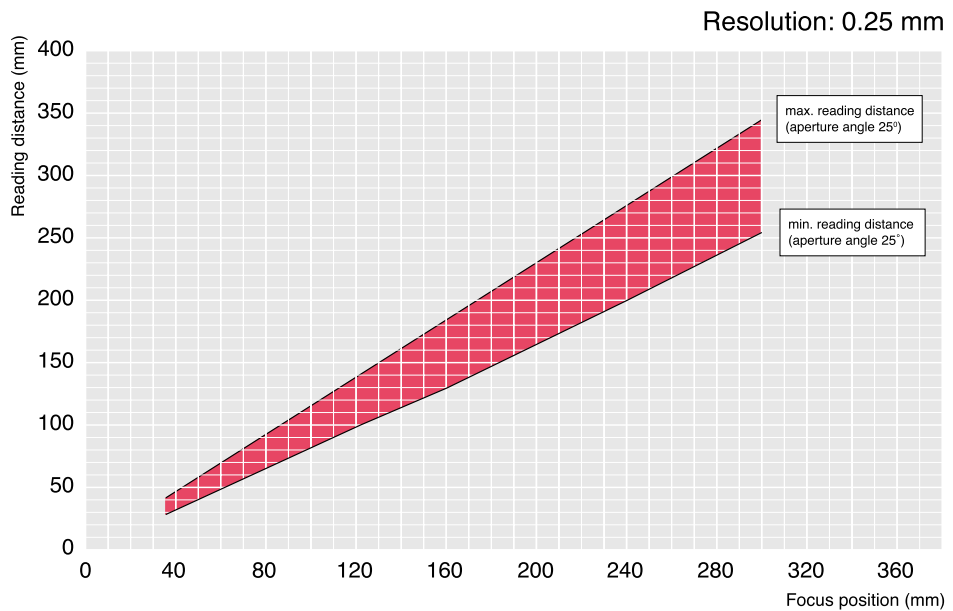

Technical data line/raster scanner

Type	CLV 440	CLV 442
Line scanner	CLV 440-0010/Order No. 1 017 588	CLV 442-0010/Order No. 1 017 595
Focus	dynamic focus control	
Number of distance configurations	max. 8	
Focus adjustment time	≤ 50 ms (from min. to max focus position)	
Focus trigger source	„Sensor 2“ switching input/serial interface/timer	
Laser diode (wavelength)	red light ($\lambda= 670$ nm)	
Service life of laser diode	MTBF 20,000 h	
Laser class	Class 2 (pursuant to DIN EN 60825-1)	
Useful aperture angle	max. 50°	
Scanning/decoding frequency	300 ... 800 Hz	
Resolution	0.2 ... 1.0 mm	
Bar code print contrast (PCS)	≥ 60 %	
Immunity to ambient light	2000 lx (on bar code)	
No. of bar codes per scan	1 ... 20 (standard decoder), 1 ... 6 (SMART decoder)	
No. of bar codes per reading interval	1 ... 50 (autodiscriminating)	
Bar code types (SMART decoder)	Code 39, Code 128, Code 93, Codabar, EAN, EAN 128, UPC, 2/5 Interleaved	
Bar code length	max. 50 characters (max. 500 characters across all bar codes per reading interval)	
Print ratio	2:1 ... 3:1	
No. of multiple reads	1 ... 99	
Optical indicators	4 x LEDs	
Acoustic indicator	Beeper, can be deactivated and assigned to a function for result status indication	
Reading pulse	Reflector polling/“Sensor 1” switching input/free running/serial interface	
“Host” data interface	RS 232 or RS 422/485, variable data output format	
Data transfer rate	300 ... 57 600 Bits/s	
Protocols	SICK Standard , SICK Network and 3964 (R)	
Physical configurations	Stand-alone, SICK Network (Bus), Daisy Chain (Pass-Through or Master/Slave)	
“Terminal” data interface	RS 232, 9600 baud, 8 data bits, no parity, 1 stop bit, fixed output format	
Switching inputs	2 (“Sensor 1”, “Sensor 2”)	
Switching outputs	2 (“Result 1”, “Result 2”)	
Electrical connection	15-pin D Sub HD connector, cable length 0.9 m	
Operating voltage/power consumption	10 ... 30 V DC/4 W	
Housing	Cast zinc die-cast, does not represent a problem in paint shops	
Enclosure rating/protection class	IP 65 (to DIN 40 050)/ Class 3 (to VDE 0106/IEC 1010-1)	
EMC/vibration/shock tested	to EN 50081-2, EN 50082-1, EN 50082-2/to IEC 68-2-6 Test FC/to IEC 68-2-27 Test EA	
Weight	420 g with connecting cable	
Operating/storage temperature	0 ... +40 °C/-20 ... +70 °C	
Max. rel. humidity	90 %, non condensing	

Oscillating mirror

Additional variants, such as angled and oscillating mirror versions, provide solutions for special requirements, such as reading bar codes on large areas.

Oscillating mirror

The oscillating mirror enables the CLV to deflect the scan line so that it is perpendicular to the scanning direction. By doing so, the CLV can identify bar codes in large areas.

Various operating modes are provided:

■ Free selectable angular position:

The oscillating mirror can be positioned at any angle.

■ Oscillating mirror with variable deflection range:

Deflects the scan line up to the amplitude setting (max. $\pm 20^\circ$).


■ One shot:

Single oscillating movement for each reading gate, comprising one forward and return phase of the oscillating mirror.


Additional technical data of line scanner with oscillating mirror

Type	CLV 440
Line scanner with oscillating mirror	CLV 440-6010/Order No. 1 017 984
Reading window	side
Angle of emergence	105° (center position CW=50)
Trigger source for DC ¹⁾ switchover	also: oscillating mirror reversal points
Useful aperture angle	max. 50°
Oscillating mirror functions	permanent (variable position)/oscillating (amplitude per DC variable or fixed)/one-shot
Oscillating frequency	0.5 ... 4 Hz
Max. angle of deflection	+20° ... -20° (can be set with software)
Operating voltage/power consumption	10 ... 30 V DC/max 6.15 W
Weight	620 g with connecting cable


¹⁾ DC = distance configuration

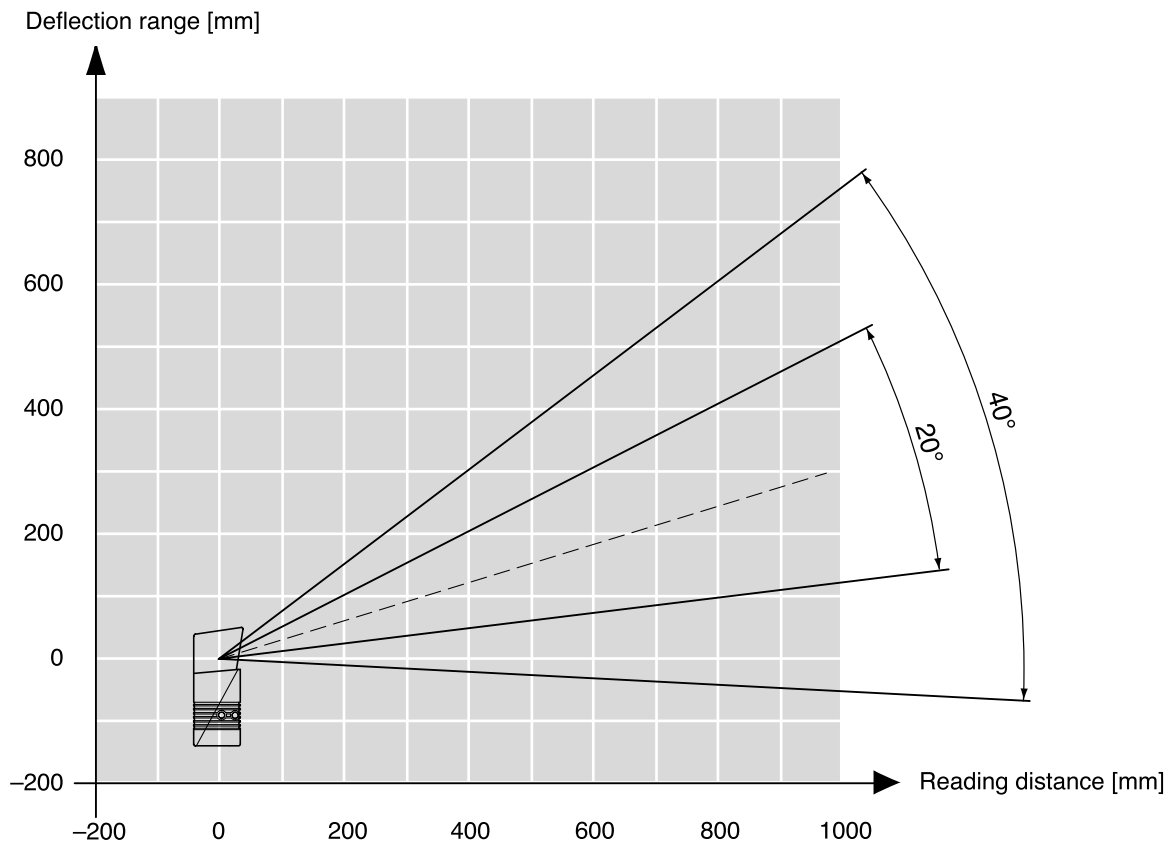

Line scanner
 CLV 440-0010
 CLV 442-0010

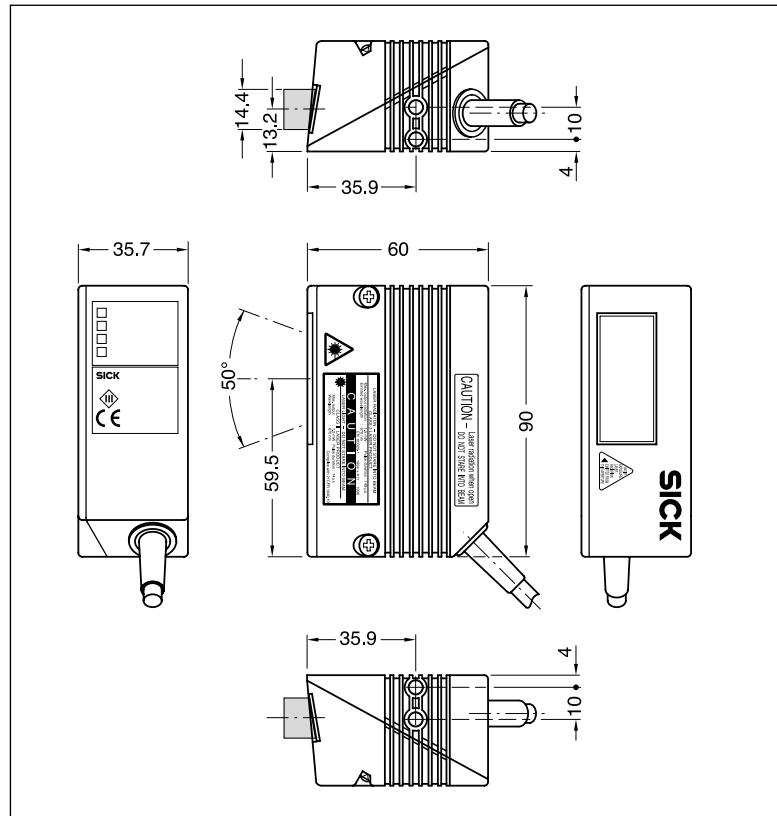

Line scanner with
 oscillating mirror
 CLV 440-6010

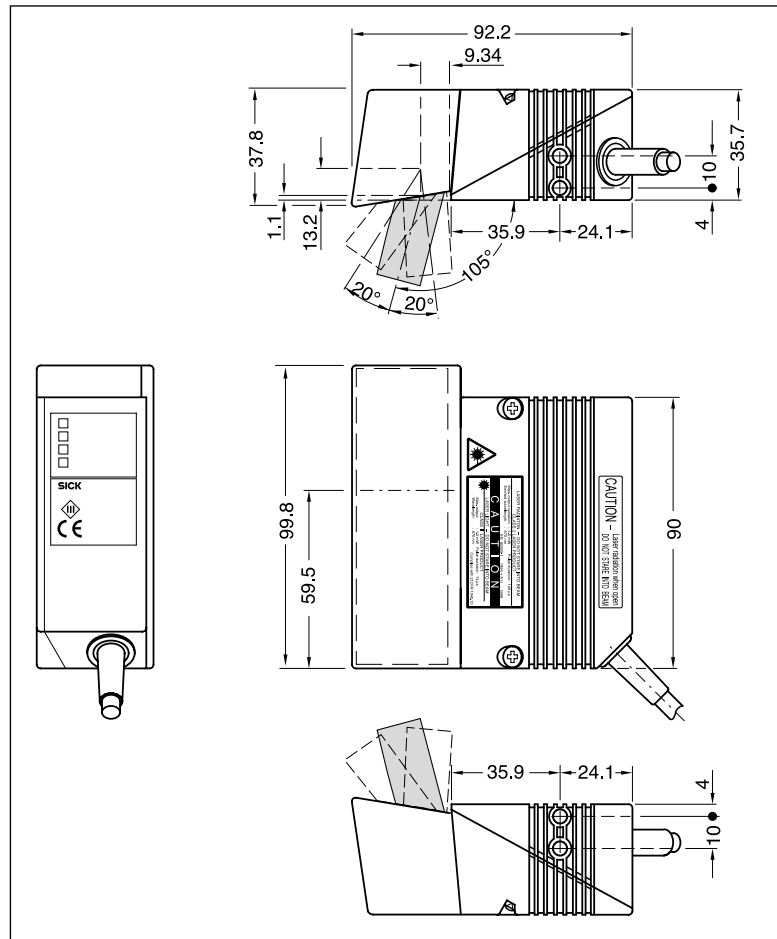

All tapped blind holes
 5 M, 5 mm deep.

Australia

Phone +61 3 9497 4100
(0 08) 33 48 02-toll free
Fax +61 3 9497 1187

Austria

Phone +43 22 36-62 28 8-0
Fax +43 22 36-62 28 85

Belgium/Luxembourg

Phone +32 24 66 55 66
Fax +32 24 63 35 07

Laser Measurement Systems:
Phone +32 9 2240 394
Fax +32 9 2235 645

Brazil

Phone +55 11 5561 2683
Fax +55 11 535 4153

China/Hong Kong

Phone +85 2 2763 6966
Fax +85 2 2763 6311

Czech Republic

Phone +42 02-579 11 850
+42 02-578 10 561
Fax +42 02-578 10 559

Denmark

Phone +45 45 82 64 00
Fax +45 45 82 64 01

Finland

Phone +358 9-728 85 00
Fax +358 9-72 88 50 55

France

Phone +33 1 64 62 35 00
Fax +33 1 64 62 35 77

Germany

Phone (+49 2 11) 53 01-0
Fax (+49 2 11) 53 01-1 00

Great Britain

Phone +44 17 27-83 11 21
Fax +44 17 27-85 67 67

Italy

Phone +39 02-92 14 20 62
Fax +39 02-92 14 20 67

Japan

Phone +81 3 3358 1341
Fax +81 3 3358 0586

Netherlands

Phone +31 30 229 25 44
Fax +31 30 229 39 94

Laser Measurement Systems:
Phone +31 73 599 50 44
Fax +31 73 599 47 18

Norway

Phone +47 67 56 75 00
Fax +47 67 56 66 10

Poland

Phone +48 2 26 44 83 45
Fax +48 2 26 44 83 42

Singapore

Phone +65 744 3732
Fax +65 841 7747

Spain

Phone +34 93 4 80 31 00
Fax +34 93 4 73 44 69

Sweden

Phone +46 8-680 64 50
Fax +46 8-710 18 75

Switzerland

Phone +41 41 61 92 93 9
Fax +41 41 61 92 92 1

Taiwan

Phone +886 2 2365-6292
Fax +886 2 2368-7397

USA

Phone +1 (952) 941-6780
Fax +1 (952) 941-9287

Representatives and agencies in all major industrial countries.



SICK AG
Auto Ident
Nimburger Straße 11
79276 Reute
Germany
<http://www.sick.de>

Received from your SICK partner: